# EXHIBIT 6

US009712986B2

## (12) United States Patent

**Fiatal** 

(10) Patent No.: US 9,712,986 B2

(45) **Date of Patent: Jul. 18, 2017** 

### (54) MOBILE DEVICE CONFIGURED FOR COMMUNICATING WITH ANOTHER MOBILE DEVICE ASSOCIATED WITH AN ASSOCIATED USER

(75) Inventor: **Trevor Fiatal**, Fremont, CA (US)

(73) Assignee: Seven Networks, LLC, Marshall, TX

(US)

(\*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 72 days.

(21) Appl. No.: 13/427,748

(22) Filed: Mar. 22, 2012

### (65) Prior Publication Data

US 2012/0178414 A1 Jul. 12, 2012

#### Related U.S. Application Data

- (60) Division of application No. 13/208,200, filed on Aug. 11, 2011, which is a continuation of application No. 12/008,710, filed on Jan. 11, 2008, now Pat. No. 8,107,921.
- (51) Int. Cl.

  H04W 4/26 (2009.01)

  H04W 4/20 (2009.01)

  H04M 3/487 (2006.01)

  H04W 4/24 (2009.01)

  H04W 12/06 (2009.01)

  H04W 4/16 (2009.01)

(52) U.S. Cl.

CPC ............. H04W 4/20 (2013.01); H04M 3/4872 (2013.01); H04W 4/16 (2013.01); H04W 4/24 (2013.01); H04W 12/06 (2013.01)

(58) Field of Classification Search

CPC ....... H04L 29/06; H04W 4/26; H04W 64/00; G06F 21/10; G06Q 30/06; H04N 7/1675

USPC .............. 455/405, 406, 456, 1, 466; 709/229 See application file for complete search history.

### (56) References Cited

#### U.S. PATENT DOCUMENTS

222,458	A 1	2/1879	Connolly et al.
447,918	A	3/1891	Strowger
4,200,770	A	4/1980	Hellman et al.
4,255,796	A	3/1981	Gabbe et al.
4,276,597	A	6/1981	Dissly et al.
4,531,020	A	7/1985	Wechselberger et al.
4,807,182	A	2/1989	Queen
		(Cont	inued)

#### FOREIGN PATENT DOCUMENTS

EP	0772327 A2	5/1997
EP	1278390 A1	1/2003
	(Conti	inued)

#### OTHER PUBLICATIONS

Allchin, James Edward, "An Architecture for Reliable Decentralized Systems," Ph.D. Thesis, Georgia Institute of Technology, 185 pages, Sep. 1983.


(Continued)

Primary Examiner — Myron K Wyche (74) Attorney, Agent, or Firm — NK Patent Law, PLLC

### (57) ABSTRACT

Systems and methods for operating a mobile virtual network are disclosed. A mobile virtual network operator is disclosed as an entity that provides a mobile networking service to a user, the mobile networking service being provided using a physical mobile network provided by a third party. The mobile virtual network operator may provide content distribution services, data access services, or messaging services to a user of a mobile device.

#### 29 Claims, 4 Drawing Sheets

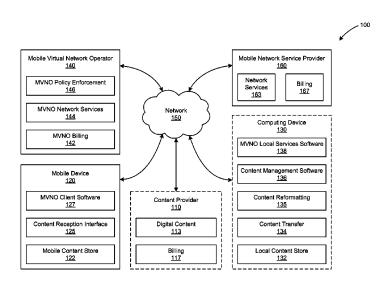

(56)	Referer	nces Cited	5,758,322			Rongley
TT	C DATENIT	DOCLIMENTS	5,758,354 5,758,355			Huang et al. Buchanan
U.	S. PATENT	DOCUMENTS	5,765,171			Gehani et al.
4,831,582 A	5/1989	Miller et al.	5,778,346			Frid-Nielsen et al.
4,875,159 A		Cary et al.	5,778,361			Nanjo et al.
4,897,781 A		Chang et al.	5,781,614			Brunson
4,972,457 A		O'Sullivan	5,781,901			Kuzma
5,008,853 A		Bly et al.	5,781,906 5,787,430			Aggarwal et al. Doeringer et al.
5,159,624 A 5,220,657 A		Makita Bly et al.	5,787,441			Beckhardt
5,263,157 A	11/1993		5,790,425	A	8/1998	Wagle
5,283,856 A	2/1994	Gross et al.	5,790,790			Smith et al.
5,357,431 A		Nakada et al.	5,790,974 5,793,413			Tognazzini Hylton et al.
5,384,892 A		Strong	5,794,210			Goldhaber et al.
5,386,564 A 5,392,390 A		Shearer et al. Crozier	5,799,318			Cardinal et al.
5,434,994 A		Shaheen et al.	5,802,312			Lazaridis et al.
5,436,960 A	7/1995	Campana, Jr. et al.	5,802,454			Goshay et al.
5,438,611 A		Campana, Jr. et al.	5,802,518 5,802,524			Karaev et al. Flowers et al.
5,479,472 A		Campana, Jr. et al.	5,802,324			Souder et al.
5,487,100 A 5,493,692 A	1/1996 2/1996	Theimer et al.	5,809,242			Shaw et al.
5,519,606 A		Frid-Nielsen et al.	5,809,415	A		Rossmann
5,555,376 A	9/1996	Theimer et al.	5,818,437			Grover et al.
5,559,800 A		Mousseau et al.	5,819,172 5,819,274			Campana, Jr. et al. Jackson, Jr.
5,572,571 A 5,572,643 A	11/1996 11/1996		5,819,284			Farber et al.
5,574,859 A	11/1996		5,822,324			Kostresti et al.
5,581,749 A		Hossain et al.	5,822,747			Graefe et al.
5,600,834 A		Howard	5,826,269		10/1998	
5,603,054 A		Theimer et al.	5,831,664 5,832,483		11/1998	Wharton et al.
5,604,788 A 5,613,012 A	2/1997 3/1997	Tett Hoffman et al.	5,832,489		11/1998	
5,619,507 A		Tsuda	5,832,500	A	11/1998	Burrows
5,619,648 A	4/1997	Canale et al.	5,835,087			Herz et al.
5,623,601 A	4/1997		5,835,722 5,838,252		11/1998	Bradshaw et al.
5,625,670 A 5,625,815 A		Campana, Jr. et al. Maier et al.	5,838,768			Sumar et al.
5,627,658 A		Connors et al.	5,838,973	A		Carpenter-Smith et al.
5,630,081 A		Rybicki et al.	5,845,278			Kirsch et al.
5,631,946 A		Campana, Jr. et al.	5,852,775 5,852,820		12/1998	Burrows
5,632,018 A 5,634,053 A		Otorii Noble et al.	5,857,201			Wright, Jr. et al.
5,647,002 A		Brunson	5,862,223			Walker et al.
5,652,884 A		Palevich	5,867,665			Butman et al.
5,664,207 A		Crumpler et al.	5,867,817 5,870,759			Catallo et al. Bauer et al.
5,666,530 A 5,666,553 A		Clark et al. Crozier	5,884,323			Hawkins et al.
5,680,542 A		Mulchandani et al.	5,889,845		3/1999	
5,682,524 A		Freund et al.	5,890,147			Peltonen et al.
5,684,990 A		Boothby	5,892,909 5,898,780			Grasso et al. Liu et al.
5,689,654 A 5,692,039 A		Kikinis et al. Brankley et al.	5,898,917			Batni et al.
5,696,903 A		Mahany	5,903,723			Beck et al.
5,701,423 A		Crozier	5,907,618			Gennaro et al. Van Ryzin
5,701,469 A		Brandli et al.	5,909,689 5,913,032			Schwartz et al.
5,704,029 A 5,706,211 A		Wright, Jr. Beletic et al.	5,924,096			Draper et al.
5,706,502 A		Foley et al.	5,928,325		7/1999	Shaughnessy et al.
5,706,507 A		Schloss	5,928,329 5,937,161		7/1999 8/1999	Clark et al. Mulligan et al.
5,710,918 A 5,713,019 A		Lagarde et al.	5,943,676		8/1999	Boothby
5,715,019 A 5,715,403 A		Keaten Stefik	5,948,066		9/1999	
5,717,925 A		Harper et al.	5,951,636		9/1999	
5,721,908 A		Lagarde et al.	5,960,394 5,960,406		9/1999 9/1999	Gould et al. Rasansky et al.
5,721,914 A		DeVries Kucala	5,961,590		10/1999	Mendez et al.
5,727,202 A 5,729,549 A		Kostreski et al.	5,963,642		10/1999	
5,729,704 A		Stone et al.	5,964,833		10/1999	
5,729,735 A		Meyering	5,968,131		10/1999	
5,742,905 A		Pepe et al.	5,974,238 5,974,327		10/1999	Chase, Jr. Agrawal et al.
5,745,360 A 5,752,186 A		Leone et al. Malackowski et al.	5,978,837			Foladare et al.
5,752,246 A		Rogers et al.	5,978,933			Wyld et al.
5,754,938 A	5/1998	Herz et al.	5,987,440	A	11/1999	O'Neil et al.
5,757,916 A		MacDoran et al.	6,000,000		12/1999	Hawkins et al.
5,758,088 A		Bezaire et al. Bell et al.	6,003,070 6,006,274		12/1999	Frantz Hawkins et al.
5,758,150 A	3/1998	Den et al.	0,000,274	Л	14/1777	mawkins Cl al.

(56)		Referen	ces Cited	6,289,214			Backstrom	
	П	PATENT	DOCUMENTS	6,292,904 6,295,541			Broomhall et al. Bodnar et al.	
	0.1	J. 12 (1 LAVI	DOCUMENTS	6,300,947			Kanevsky	
6,016,	478 A	1/2000	Zhang et al.	6,304,881			Halim et al.	
6,016,			Facq et al.	6,308,201 6,317,594			Pivowar et al. Gossman et al.	
6,018,			Brunson et al.	6,320,943			Borland	
6,023, 6,023,			Owens et al. Mendez et al.	6,324,541			de l'Etraz et al.	
6,029,			Furukawa	6,324,542	B1		Wright, Jr. et al.	
6,034,			Kaufman	6,324,544			Alam et al.	
6,035,			Zahariev	6,324,587 6,327,586		12/2001	Trenbeath et al. Kisiel	
6,044, 6,044,			Rothfus et al. Boothby et al.	6,336,117			Massarani	
6,047,		4/2000	Ginzboorg et al.	6,356,937			Montville et al.	
6,047,		4/2000	Tso et al.	6,363,352 6,370,566			Dailey et al.	
6,052,			Macko	6,377,810			Discolo et al. Geiger et al.	
6,052, 6,057,			Ulrich et al. Barkans	6,380,959			Wang et al.	
6,065,			Hughes et al.	6,389,422			Doi et al.	
6,073,			de l'Etraz et al.	6,389,455		5/2002		
6,073,			Geiger et al.	6,389,457 6,397,057			Lazaridis et al. Malackowski et al.	
6,073, 6,085,			Narasimhan et al. Beckhardt et al.	6,397,230			Carmel et al.	
6,085,			Mendez et al.	6,401,104			LaRue et al.	
6,088,			Spurgeon	6,401,112			Boyer et al.	
6,101,			Schuetze et al.	6,401,113 6,405,197			Lazaridis et al. Gilmour	
6,101, 6,101,			Conmy et al. Eggleston et al.	6,411,696			Iverson et al.	
6,112,			Shear et al.	6,415,031			Colligan et al.	
6,119,	)14 A		Alperovich et al.	6,418,308			Heinonen et al.	
6,119,			Alkhatib	6,421,669 6,421,781			Gilmour et al. Fox et al.	
6,125, 6,125,			Wu et al. Reisman	6,430,602			Kay et al.	
6,128,			Mattis et al.	6,438,585	B2	8/2002	Mousseau et al.	
6,130,	398 A		Kostreski et al.	6,438,612			Ylonen et al.	
6,131,			Ng et al.	6,442,589 6,442,637			Takahashi et al. Hawkins et al.	
6,131, 6,134,			Riggins et al. Holmes et al.	6,446,118			Gottlieb	
6,138,			Blanchard et al.	6,463,463	B1	10/2002	Godfrey et al.	
6,138,	124 A	10/2000	Beckhardt	6,463,464			Lazaridis et al.	
6,138,			Perkowitz et al.	6,487,557 6,487,560			Nagatomo LaRue et al.	
6,138, 6,141,			Moon et al. Boothby	6,490,353		12/2002		
6,151,			Mendez	6,496,802	B1		van Zoest et al.	
6,157,	530 A	12/2000	Adler et al.	6,499,054			Hesselink et al.	
6,161,		12/2000	•	6,505,214 6,507,727		1/2003	Sherman et al. Henrick	G06O 30/06
6,167, 6,167,		12/2000	Dean et al. Druckenmiller et al.	0,507,727	Di	1/2003	Tremtek	348/E7.071
	)14 B1		Darago et al.	6,516,327			Zondervan et al.	
	312 B1		Atarashi et al.	6,526,433		2/2003	Chang et al.	
	146 B1		Khan et al. Weinreich et al.	6,526,506 6,529,908		2/2003 3/2003	Piett et al.	
	831 B1 419 B1		Legh-Smith et al.	6,532,446		3/2003		
6,181,	935 B1	1/2001	Gossman et al.	6,535,892		3/2003	LaRue et al.	
	533 B1		Tkatch et al.	6,546,005 6,549,939			Berkley et al. Ford et al.	
	596 B1 922 B1		Korpi et al. Baynham	6,556,217			Mäkipää et al.	
	169 B1		Balch et al.	6,593,944	В1	7/2003	Nicolas et al.	
6,202,	085 B1	3/2001	Benson et al.	6,601,026			Appelt et al.	
	148 B1		Kruglikov et al.	6,615,253 6,618,710			Bowman-Amuah Zondervan et al.	
	529 B1 594 B1		Boothby et al. Lazaridis et al.	6,621,892			Banister et al.	
	377 B1		Aronov et al.	6,625,621	B2	9/2003	Tan et al.	
6,223,	187 B1	4/2001	Boothby et al.	6,636,482			Cloonan et al.	
	586 B1		Rothschild et al.	6,639,693 6,640,097			Ejiri et al. Corrigan et al.	
	341 B1 705 B1		Riggins Kucala	6,640,244			Bowman-Amuah	
6,246,	375 B1	6/2001	Seazholtz et al.	6,640,249	B1	10/2003	Bowman-Amuah	
6,247,	135 B1	6/2001	Feague	6,643,650			Slaughter et al.	
	808 B1		Seshadri Singhal	6,643,688 6,647,384		11/2003	Fuisz Gilmour	
	566 B1 201 B1		Singhal Hashimoto et al.	6,650,890			Irlam et al.	
	340 B1			6,662,016			Buckham et al.	
6,269,	369 B1	7/2001	Robertson	6,668,046	B1	12/2003	Albal	
	545 B1		Flanagin et al.	6,671,695			McFadden	
	850 B1 858 B1		Beyda et al.	6,671,700			Creemer et al.	
	858 B1 212 B1		Bates et al. Stein et al.	6,671,702 6,671,757			Kruglikov et al. Multer et al.	
0,209,	-12 171	5/2001	Stem et al.	0,011,131	171	12/2003	ritation of all	

(56)		Referen	ces Cited	6,999,753			Beckmann et al.
	U.S.	PATENT	DOCUMENTS	7,020,685 7,024,491			Chen et al. Hanmann et al.
	0			7,026,984			Thandu et al.
6,694,33			Multer et al.	7,032,242 7,035,630			Grabelsky et al. Knowles
6,697,80 6,701,3°			McGeachie Gilhuly et al.	7,035,030	B2		Haaramo et al.
6,707,80		3/2004	Hsu	7,047,202	B2	5/2006	Jaipuria et al.
6,708,22	21 B1	3/2004	Mendez et al.	7,062,024			Kreckel et al.
6,714,96			Kakuta et al.	7,069,308 7,072,678			Abrams Allison
6,721,78 6,727,93			Hiscock Chew et al.	7,079,499			Akhtar et al.
6,728,53		4/2004	Heinonen et al.	7,080,371			Arnaiz et al.
6,728,78			Hawkins et al.	7,082,316 7,085,365			Eiden et al. Kauppinen
6,732,10 6,732,13		5/2004 5/2004	Hesselink et al.	7,092,696		8/2006	Hosain et al.
6,735,59		5/2004		7,096,030			Huomo
6,741,23			Siedlikowski et al.	7,100,821 7,103,432		9/2006	Rastı Drader et al.
6,741,83 6,742,03			Martin et al. Bowman-Amuah	7,120,692			Hesselink et al.
6,745,02			DeJaco et al.	7,120,928			Sheth et al.
6,745,32		6/2004		7,130,839 7,136,645			Boreham et al. Hanson et al.
6,756,88 6,757,36			Benes et al. Cooper et al.	7,130,043		11/2006	
6,757,69			Multer et al.	7,139,565	B2	11/2006	Fiatal et al.
6,760,9	16 B2	7/2004	Holtz et al.	7,140,549		11/2006	
6,771,29 6,775,36			Pulli et al.	7,146,645 7,149,780		12/2006	Hellsten et al. Quine et al.
6,779,0			Ransom Mousseau et al.	7,149,789		12/2006	
6,782,40	09 B1	8/2004	Yoshida	7,149,959		12/2006	
6,785,86		8/2004		7,162,241 7,165,727			Kim et al. de Jong
6,785,90 6,799,19			Gaughan et al. Boothby	7,172,118		2/2007	
6,804,70			Ronning	7,174,156			Mangal
6,816,84		11/2004	· · · · · · · · · · · · · · · · · · ·	7,181,228 7,184,790			Boesch Dorenbosch et al.
6,820,08 6,820,20			Hind et al. Desai et al.	7,185,362			Hawkes et al.
6,829,48			Eiden et al.	7,194,273	B2		Vaudreuil
6,834,19			Brandenberg et al.	7,200,390 7,203,733		4/2007 4/2007	Henager et al.
6,847,9′ 6,850,7:			Wachtel Watanabe et al.	7,205,733		4/2007	
6,859,2			Kumar et al.	7,209,757	B2	4/2007	Naghian et al.
6,867,7	74 B1		Halmshaw et al.	7,219,222 7,224,957			Durbin et al.
6,868,44 6,871,22			Slaughter et al. Rajan et al.	7,224,937		5/2007 6/2007	1
6,871,22			Fishman et al.	7,233,795	B1	6/2007	Ryden
6,873,68	88 B1	3/2005	Aarnio	7,234,111		6/2007	
6,874,01			Inoue et al.	7,239,877 7,240,095		7/2007	Corneille et al. Lewis
6,879,98 6,886,03			Deguchi et al. Easterbrook et al.	7,242,680			Gallant
6,892,0			Warrier et al.	7,245,926			Liao et al.
6,892,19			Hughes	7,257,391 7,257,639			Burgess et al. Li et al.
6,895,39 6,895,55			Kremer et al. Loveland	7,259,666			Hermsmeyer et al.
6,898,42		5/2005	Griffith et al.	7,260,552			Riera Jorba et al.
6,922,54			O'Neill et al.	7,260,590 7,272,830			Williams de Jong
6,922,72 6,925,4°			Minborg et al. Champagne et al.	7,277,408		10/2007	
6,931,52			Kunzinger	7,289,792		10/2007	Turunen
6,938,0			Anderson et al.	7,289,964 7,289,971		10/2007	Bowman-Amuah O'Neil et al.
6,944,44 6,944,66			Portman et al. Devine et al.	7,293,107			Hanson et al.
6,947,7			Rydbeck	7,295,853			Jin et al.
6,957,39			Hawkins et al.	7,305,252 7,305,700		12/2007 12/2007	Britt et al. Boynton et al.
6,965,91 6,966,01			Aloni et al. Earl et al.	7,303,700	B1	12/2007	Shao et al.
6,968,1	75 B2		Raivisto et al.	7,310,729	B2	12/2007	
6,970,8			Gilmour	7,349,871			Labrou et al.
6,972,68 6,973,29		12/2005 12/2005	Lareau et al.	7,359,720 7,373,386		5/2008	Hartmaier et al. Gardner et al.
6,981,04			Aprei Araujo et al.	7,374,099		5/2008	de Jong
6,981,04	47 B2	12/2005	Hanson et al.	7,376,701	B2	5/2008	Bhargava et al.
6,985,93			Singhai et al.	7,382,879		6/2008	
6,985,98 6,986,00			Pellegrino et al. Kunzinger	7,388,950 7,389,412		6/2008	Elsey et al. Sharma et al.
6,987,73			Hundemer	7,392,483	B2		Wong et al.
6,990,4	72 B2	1/2006	Rosenhaft et al.	7,395,329	B1	7/2008	Holt et al.
6,993,32			Link, II et al.	7,398,271			Borkovsky et al.
6,993,32	27 <b>B</b> 2	1/2006	Mathis	7,430,609	<b>B</b> 2	9/2008	Brown et al.

(56)	Refere	aces Cited	9,369,424 B2		Gent et al.
U.:	S. PATENT	DOCUMENTS	2001/0009025 A1 2001/0010046 A1	7/2001 7/2001	Ahonen Muyres et al.
			2001/0013069 A1	8/2001	Shah
7,441,271 B2 7,461,071 B2		Fiatal et al. Fitzpatrick et al.	2001/0023414 A1 2001/0032254 A1	9/2001 10/2001	Kumar et al. Hawkins
7,465,231 B2		Lewin et al.	2001/0034225 A1	10/2001	Gupte et al.
7,469,125 B2	12/2008	Nurmi	2001/0034244 A1	10/2001 11/2001	Calder et al.
7,483,036 B2		Moore	2001/0037453 A1 2001/0039191 A1	11/2001	Mitty et al. Maierhofer
7,499,537 B2 7,502,615 B2		Elsey et al. Wilhoite et al.	2001/0041566 A1	11/2001	Xanthos et al.
7,516,208 B1	4/2009	Kerrison et al.	2001/0042009 A1	11/2001	Montague
7,516,238 B2		Key et al.	2001/0042099 A1 2001/0043148 A1	11/2001 11/2001	Peng Stewart
7,519,042 B2 7,526,547 B2		Gorday et al. Rodrigo	2001/0053687 A1	12/2001	Sivula
7,532,571 B1		Price et al.	2002/0002478 A1		Swart et al.
7,539,665 B2		Mendez	2002/0002591 A1 2002/0007303 A1		Ketola Brookler et al.
7,548,947 B2 7,551,900 B2		Kasriel et al. Kang et al.	2002/0013727 A1	1/2002	
7,567,575 B2	7/2009	Chen et al.	2002/0019225 A1		Miyashita
7,574,208 B2		Hanson et al.	2002/0019812 A1 2002/0035556 A1	3/2002	Board et al. Shah et al.
7,575,171 B2 7,584,294 B2		Plamondon	2002/0035617 A1		Lynch et al.
7,587,482 B2		Henderson et al.	2002/0038253 A1		Seaman et al.
7,587,608 B2		Haller et al.	2002/0042875 A1 2002/0049828 A1		Shukla Pekarek-Kostka
7,593,714 B2 7,596,608 B2		Schultz et al. Alexander et al.	2002/0053078 A1		Holtz et al.
7,613,792 B2		Zervas et al.	2002/0055351 A1		Elsey et al.
7,643,818 B2		Backholm et al.	2002/0059201 A1 2002/0059457 A1	5/2002 5/2002	
7,644,166 B2 7,672,439 B2		Appelman et al. Appelman et al.	2002/0062384 A1	5/2002	Tso
7,680,281 B2		Fiatal et al.	2002/0068559 A1	6/2002	
7,689,664 B2	3/2010	Karlberg	2002/0073207 A1 2002/0077077 A1	6/2002	Widger et al. Rezvani et al.
7,693,944 B2 7,694,008 B2		Appelman et al. Chang et al.	2002/0077077 A1 2002/0077084 A1		Zellner et al.
7,706,781 B2		Backholm et al.	2002/0078384 A1		Hippelainen
7,752,633 B1		Fleming	2002/0087549 A1 2002/0087679 A1		Mostafa Pulley et al.
7,757,956 B2 7,769,395 B2		Koenck et al. Fiatal et al.	2002/0087679 A1 2002/0089542 A1		Imamura
7,769,400 B2		Backholm et al.	2002/0091921 A1		Kunzinger
7,769,805 B1		Barnes et al.	2002/0095319 A1 2002/0095328 A1	7/2002 7/2002	Swart et al. Swart et al.
7,778,792 B2 7,783,757 B2		Huang et al. Plamondon	2002/0095328 A1 2002/0095391 A1	7/2002	
7,785,757 B2		Sutaria et al.	2002/0095399 A1		Devine et al.
7,797,064 B2		Loomis et al.	2002/0098855 A1 2002/0099613 A1		Hartmaier et al. Swart et al.
7,809,818 B2 7,827,055 B1		Plamondon Snodgrass et al.	2002/0099809 A1	7/2002	
7,827,597 B2		Boynton et al.	2002/0101975 A1	8/2002	Tiburtius et al.
7,853,563 B2		Alvarado et al.	2002/0107944 A1 2002/0107985 A1	8/2002 8/2002	Bai et al. Hwang et al.
7,877,703 B1 7,881,745 B1		Fleming Rao et al.	2002/0116499 A1	8/2002	Enns et al.
7,899,996 B1		Levin-Michael	2002/0116501 A1	8/2002	Ho et al.
7,917,505 B2		van Gent et al.	2002/0120766 A1 2002/0120779 A1	8/2002	Okajima et al. Teeple et al.
7,921,167 B2 7,933,929 B1		Shroff et al. McClendon et al.	2002/0126701 A1		Requena
7,937,091 B2	5/2011	Roman et al.	2002/0133504 A1	9/2002	
7,953,934 B2		Thomas et al.	2002/0138439 A1 2002/0144109 A1	9/2002	Matsushima et al. Benantar et al.
7,957,691 B1	* 6/2011	Lee H04L 67/306 455/3.01	2002/0146129 A1	10/2002	
7,970,860 B2	6/2011	Kline et al.	2002/0152379 A1		Gefwert et al.
7,996,487 B2			2002/0155848 A1 2002/0156839 A1	10/2002	Suryanarayana Peterson et al.
8,000,720 B2 8,005,891 B2		Aaron 455/456.1 Knowles et al.	2002/0158908 A1		Vaajala et al.
8,010,082 B2		Sutaria et al.	2002/0161587 A1		Pitts, III et al.
8,024,452 B2		Shenfield et al.	2002/0161925 A1 2002/0161928 A1	10/2002	Munger et al. Ndili
8,032,409 B1 8,064,583 B1		Mikurak Sutaria et al.	2002/0164977 A1	11/2002	Link, II et al.
8,069,166 B2	11/2011	Alvarado et al.	2002/0167484 A1		Hatanaka et al.
8,078,158 B2		Backholm	2002/0169700 A1 2002/0174189 A1	11/2002	Huffman et al.
8,087,085 B2 8,412,932 B2		Hu et al. Schneider	2002/01/4189 A1 2002/0186848 A1	12/2002	
8,504,680 B1	8/2013	Hernacki et al.	2002/0188940 A1	12/2002	Breckner et al.
8,539,552 B1	* 9/2013	,	2002/0193094 A1		Lawless et al.
8,577,732 B1	11/2013	709/225 Martin et al.	2002/0194209 A1 2002/0198027 A1		Bolosky et al. Rydbeck
8,584,234 B1		Sobel et al.	2003/0005151 A1		Ullman et al.
8,831,561 B2	9/2014	Sutaria et al.	2003/0022662 A1	1/2003	
8,849,902 B2		Fiatal	2003/0023692 A1		Moroo
8,862,657 B2	10/2014	riatai	2003/0023975 A1	1/2003	Schrader et al.

(56)	Referen	ces Cited		4/0107319			D'Orto et al.
ZII	PATENT	DOCUMENTS		4/0120323 4/0123304		6/2004 6/2004	
0.5.	IMILIVI	DOCOMENTS		4/0128375		7/2004	Rockwell
2003/0028430 A1	2/2003	Zimmerman		4/0133626			Herrero et al.
2003/0028441 A1		Barsness et al.		4/0141011		7/2004 7/2004	
2003/0028596 A1	2/2003	Toyota et al.		4/0147248 4/0147262			Will Lescuyer et al.
2003/0050041 A1 2003/0050976 A1	3/2003	Wu Block et al.		4/0158611			Daniell et al.
2003/0050576 A1 2003/0053463 A1		Vikberg et al.	2004	4/0167966	A1		Lee et al.
2003/0054810 A1		Chen et al.		4/0170257			Gross et al.
2003/0055882 A1		Kawamura		4/0172481 4/0176128		9/2004	Engstrom Grabelsky et al.
2003/0056096 A1 2003/0060188 A1		Albert et al.		4/01/7369			Akins, III
2003/0060188 A1 2003/0063120 A1		Gidron et al. Wong et al.		4/0179513		9/2004	Smith et al.
2003/0065738 A1		Yang et al.		4/0181550			Warsta et al.
2003/0065739 A1		Shnier		4/0186902		9/2004	
2003/0065802 A1		Vitikainen et al.		4/0189610 4/0199497		9/2004 10/2004	
2003/0070061 A1 2003/0072451 A1		Wong et al. Pimentel et al.		4/0199582		10/2004	
2003/0072431 A1 2003/0078880 A1		Alley et al.	2004	4/0199663	A1	10/2004	Horvitz et al.
2003/0084165 A1		Kjellberg et al.		4/0205248			Little et al.
2003/0088629 A1		Berkowitz et al.		4/0205330 4/0209602		10/2004 10/2004	Godfrey et al. Joyce et al.
2003/0093691 A1 2003/0097381 A1		Simon et al. Detweiler et al.		4/0210639		10/2004	Ben-Yoseph et al.
2003/009/381 A1 2003/0100321 A1		Rao et al.		4/0219932		11/2004	Verteuil
2003/0100321 A1		Grube et al.		4/0230619		11/2004	Blanco et al.
2003/0117432 A1		Kautto-Kiovula et al.		4/0233930		11/2004	J /
2003/0120685 A1		Duncombe et al.		4/0236792 4/0252816		11/2004 12/2004	
2003/0125023 A1 2003/0126216 A1		Fishler Avila et al.		4/0255126		12/2004	
2003/0120210 A1 2003/0130984 A1		Quinlan et al.		4/0258231		12/2004	Elsey et al.
2003/0146934 A1		Bailey et al.		4/0259535		12/2004	Elsey et al.
2003/0153338 A1		Herz et al.		4/0259537		12/2004	Ackley
2003/0154212 A1		Schirmer et al.		4/0266364 4/0268148			Nguyen et al. Karjala et al.
2003/0156146 A1 2003/0157947 A1		Suomela et al. Fiatal et al.		5/0002501			Elsey et al.
2003/0157547 A1 2003/0169262 A1		Lavelle et al.	2005	5/0002508	A1	1/2005	Elsey et al.
2003/0172112 A1		Vignaud		5/0002509			Elsey et al.
2003/0177281 A1		McQuillan et al.		5/0002510 5/0010694			Elsey et al. Ma et al.
2003/0182431 A1	9/2003	Sturniolo et al. Banavar et al.		5/0015432		1/2005	
2003/0187984 A1 2003/0191971 A1		Klensin et al.		5/0021750			Abrams
2003/0204605 A1		Hudson et al.		5/0022182		1/2005	
2003/0208529 A1		Pendyala et al.		5/0027591			Gailey et al.
2003/0208559 A1	11/2003			5/0027716 5/0033812		2/2005 2/2005	Apfel McCarthy et al.
2003/0210666 A1 2003/0211845 A1		Trossen et al. Lohtia et al.		5/0037741		2/2005	
2003/0217098 A1		Bobde et al.		5/0038707			Roever et al.
2003/0217142 A1		Bobde et al.		5/0038724		2/2005	Roever et al.
2003/0223554 A1	12/2003			5/0038863 5/0041793		2/2005	Onyon et al. Fulton et al.
2003/0227745 A1 2003/0235308 A1	12/2003	Khoo Boynton et al.		5/0041793			Malik et al.
2003/0235308 AT 2003/0236981 AT		Marmigere et al.		5/0055578			Wright et al.
2004/0002324 A1		Juntunen et al.		5/0063544		3/2005	Uusitalo et al.
2004/0006630 A1		Friend et al.		5/0064852			Baldursson Key et al.
2004/0024795 A1		Hind et al.		5/0071451 5/0071489			Parupudi et al.
2004/0024892 A1 2004/0027326 A1		Creswell et al. Hays et al.		5/0071674			Chou et al.
2004/0027375 A1		Ellis et al.		5/0073982			Corneille et al.
2004/0027378 A1		Hays et al.		5/0076136			Cho et al.
2004/0043770 A1		Amit et al		5/0076241 5/0086540			Appelman Gunter et al.
2004/0049579 A1 2004/0049599 A1		Ims et al. Friend et al.		5/0094625		5/2005	
2004/0049399 A1 2004/0051715 A1		Brokenshire et al.		5/0097225			Glatt et al.
2004/0054739 A1		Friend et al.		5/0097570			Bomers
2004/0064445 A1		Pfleging et al.		5/0101307			Brugge et al. Onyon et al.
2004/0064488 A1	4/2004			5/0102257 5/0102284			Srinivasan et al.
2004/0068579 A1 2004/0068698 A1		Marmigere et al. Wu et al.		5/0102328			Ring et al.
2004/0003038 A1 2004/0073476 A1		Donahue et al.		5/0102351			
2004/0073651 A1	4/2004	Beaulieu et al.		5/0108427		5/2005	
2004/0075675 A1		Raivisto et al.		5/0117606		6/2005	
2004/0075695 A1		Chew et al.		5/0120082			Hesselink et al.
2004/0078814 A1 2004/0080515 A1	4/2004	Allen Hagiwara		5/0120084 5/0120181		6/2005	Hu et al. Arunagirinathan et al.
2004/0080313 A1 2004/0082346 A1		Skytt et al.		5/0120181		6/2005	-
2004/0098625 A1		Lagadec et al.		5/0124332			Clark et al.
2004/0103147 A1		Flesher et al.		5/0138111		6/2005	Aton et al.

(56)		Referen	ces Cited	2006/0165060	A1	7/2006	Dua
(50)		Ittleiten	ces circu	2006/0165226		7/2006	Ernst et al.
1	U.S.	PATENT	DOCUMENTS	2006/0168043			Eisenberger et al.
				2006/0168164			Lemson
2005/0144219		6/2005		2006/0179410 2006/0184534		8/2006	Nugara et al.
2005/0154698			Ikezawa et al. Forsyth	2006/0184334		8/2006	
2005/0154796 2005/0154836			Steely et al.	2006/0190413			Harper G06F 21/10
2005/0154030		7/2005					705/65
2005/0164721			Eric Yeh et al.	2006/0190428			Jung et al.
2005/0165909	A1		Cromer et al.	2006/0190984			Heard et al.
2005/0183143			Anderholm et al.	2006/0192014 2006/0195570			Hamilton et al. Zellner et al.
2005/0188038 2005/0193036		8/2005	Yabe Phillips et al.	2006/0193370			Creamer et al.
2005/0193096			Yu et al.	2006/0212531			Kikkawa et al.
2005/0203966			Labrou et al.	2006/0224629	A1		Alexander et al.
2005/0209999		9/2005		2006/0230394			Forth et al.
2005/0210104			Torvinen	2006/0240804 2006/0240805			Backholm et al. Backholm et al.
2005/0210125 2005/0228812		9/2005	Hansmann et al.	2006/0240803			Shah et al.
2005/0228812		10/2005		2006/0242210			Ring et al.
2005/0234860			Roever et al.	2006/0242320	A1	10/2006	Nettle et al.
2005/0235214	$\mathbf{A}1$	10/2005	Shimizu et al.	2006/0242607		10/2006	
2005/0246139			Rivenbark et al.	2006/0252435 2006/0253456			Henderson et al. Pacholec et al.
2005/0248526			Twerdahl et al. Little, II	2006/0253436			Sundarrajan et al.
2005/0251555 2005/0254443			Campbell et al.	2006/0259923		11/2006	
2005/0262220			Ecklund et al.	2006/0265595	A1		Scottodiluzio
2005/0273804			Preisman	2006/0271884		11/2006	
2005/0278307			Battagin et al.	2006/0272028		11/2006	
2005/0278641			Mansour et al.	2006/0277265 2006/0277271			Backholm et al. Morse et al.
2005/0278647 2005/0288006		12/2005	Leavitt et al.	2006/0294071			Weare et al.
2006/0012672			Schrader et al.	2006/0294223			Glasgow et al.
2006/0020525		1/2006	Borelli et al.	2007/0003034			Schultz et al.
2006/0020580			Dettinger et al.	2007/0005738			Alexion-Tiernan et al.
2006/0020804			Schleifer et al.	2007/0011367 2007/0019610			Scott et al. Backholm et al.
2006/0020947 2006/0021023			Hallamaa et al. Stewart et al.	2007/0022118		1/2007	
2006/0022048			Johnson	2007/0022438			Arseneau G06F 1/1626
2006/0026580			Cabillic et al.				725/45
2006/0029062			Rao et al.	2007/0027775			Hwang Fiatal et al.
2006/0029063 2006/0029064			Rao et al. Rao et al.	2007/0027832 2007/0027886			Gent et al.
2006/0031114			Zommers	2007/0027917			Ariel et al.
2006/0031365			Kay et al.	2007/0027920			Alvarado et al.
2006/0031428			Wikman	2007/0027921			Alvarado et al.
2006/0031785 2006/0036685			Raciborski Canning et al.	2007/0027930 2007/0033531		2/2007	Alvarado et al.
2006/0030083			Rao et al.	2007/0038567			Allaire et al.
2006/0046686			Hawkins et al.	2007/0038931	A1	2/2007	Allaire et al.
2006/0047844		3/2006	Deng	2007/0044041		2/2007	Beynon et al.
2006/0048061			Forlenza et al.	2007/0049258			Thibeault
2006/0052091			Onyon et al. Kouznetsov et al.	2007/0060196 2007/0061393		3/2007	Sharma Moore
2006/0059239 2006/0059495			Spector	2007/0067381			Grant et al.
2006/0063544			Zhao et al.	2007/0067424			Raciborski et al.
2006/0069686			Beyda et al.	2007/0078857			Punaganti et al.
2006/0069687			Cui et al.	2007/0078964			East et al.
2006/0069742 2006/0073810		3/2006		2007/0088790 2007/0088852			Shenfield et al. Levkovitz
2006/0073810			Pyhalammi et al. Beier et al.	2007/0088832			Campbell
2006/0075028			Zager et al.	2007/0116223			Burke et al.
2006/0084410	$\mathbf{A}1$		Sutaria et al.	2007/0117548			Fernandez-Alonso et al.
2006/0085503			Stoye et al.	2007/0118620			Cartmell et al.
2006/0093026			Montojo et al.	2007/0123214 2007/0130108		5/2007	Simpson et al.
2006/0093135 2006/0095768			Fiatal et al. Hoshino et al.	2007/0130108			Linyard et al.
2006/0095969			Portolani et al.	2007/0140193			Dosa et al.
2006/0099969	A1	5/2006	Staton et al.	2007/0149168	A1*	6/2007	Hariki H04L 12/14
2006/0112177			Barkley et al.	2007/01/0003	4.1	C/2007	455/405
2006/0123042 2006/0132495			Xie et al. Anderson	2007/0150881 2007/0156824			Khawand et al. Thompson
2006/0132433			Forbes et al.	2007/0156842			Vermeulen et al.
2006/0143464			Ananthanarayanan et al.	2007/0162514			Civetta et al.
2006/0149591		7/2006	Hanf et al.	2007/0167178		7/2007	Al-Harbi
2006/0149843			Rhoads et al.	2007/0174433			Mendez et al.
2006/0149970		7/2006		2007/0175998		8/2007	
2006/0161621	Αl	//2006	Rosenberg	2007/0198698	AI	8/2007	Boyd et al.

(56)	References Cited	2009/0016526 A1	1/2009	Fiatal et al.
	. PATENT DOCUMENTS	2009/0019485 A1 2009/0019532 A1	1/2009 1/2009	Ellis et al. Jacobsen et al.
		2009/0031006 A1 2009/0052372 A1	1/2009	Johnson Durazzo et al.
2007/0220080 A1 2007/0233855 A1	9/2007 Humphrey 10/2007 Brown et al.	2009/0052572 AT 2009/0054034 AT		Backholm et al.
2007/0245010 A1	10/2007 Arn et al.	2009/0055353 A1		Meema
2007/0249365 A1	10/2007 Jendbro	2009/0063647 A1 2009/0075683 A1		Backholm et al. Backholm et al.
2007/0250591 A1 2007/0264993 A1	10/2007 Milic-Frayling et al. 11/2007 Hughes	2009/0077263 A1		Koganti et al.
2007/0267492 A1	11/2007 Maclaine Pont	2009/0077277 A1		Vidal et al.
2007/0276767 A1	11/2007 Kim et al.	2009/0094317 A1 2009/0110179 A1		Venkitaraman Elsey et al.
2007/0276925 A1 2007/0276926 A1	11/2007 LaJoie et al. 11/2007 LaJoie et al.	2009/0119266 A1		Fitzpatrick et al.
2007/0288469 A1	12/2007 Shenfield	2009/0125523 A1 2009/0144359 A1		Fitzpatrick et al.
2007/0290787 A1 2007/0293207 A1	12/2007 Fiatal et al. 12/2007 Guedalia et al.	2009/0144539 A1 2009/0144632 A1		Karlsen et al. Mendez
2007/0293207 AT 2007/0293238 AT	12/2007 Guedana et al. 12/2007 Fiatal et al.	2009/0147008 A1	6/2009	Do et al.
2007/0294295 A1	12/2007 Finkelstein et al.	2009/0149203 A1 2009/0156178 A1		Backholm et al. Elsey et al.
2007/0294763 A1 2008/0001717 A1	12/2007 Udezue et al. 1/2008 Fiatal	2009/0150178 A1 2009/0157792 A1	6/2009	
2008/0005064 A1	1/2008 Sarukkai	2009/0164433 A1		R et al.
2008/0008095 A1	1/2008 Gilfix	2009/0164560 A1 2009/0172565 A1	6/2009 7/2009	Fiatal Jackson et al.
2008/0009344 A1 2008/0016236 A1	1/2008 Graham et al. 1/2008 Beverly et al.	2009/0172884 A1*		Bieh H04N 7/1675
2008/0022003 A1		2000/0101641	<b>5</b> /2000	713/168
2009/0022719 41	709/229	2009/0181641 A1 2009/0182500 A1	7/2009 7/2009	
2008/0032718 A1 2008/0037787 A1	2/2008 Suresh 2/2008 Boynton et al.	2009/0187939 A1	7/2009	Lajoie
2008/0059308 A1	3/2008 Gerken	2009/0191903 A1	7/2009 7/2009	
2008/0059398 A1 2008/0061142 A1	3/2008 Tsutsui 3/2008 Howcroft et al.	2009/0193130 A1 2009/0193338 A1	7/2009	
2008/0068519 A1	3/2008 Adler et al.	2009/0221326 A1	9/2009	Roussel et al.
2008/0077506 A1	3/2008 Rampell et al.	2009/0222901 A1 2009/0241180 A1	9/2009	Schneider Fistal
2008/0077571 A1 2008/0085707 A1	3/2008 Harris et al. 4/2008 Fadell		10/2009	
2008/0085724 A1	4/2008 Cormier et al.			Rowles et al.
2008/0086379 A1 2008/0086773 A1	4/2008 Dion et al. 4/2008 Tuvell et al.			Helms et al. Mahany et al.
2008/0103877 A1	5/2008 Gerken	2009/0264138 A1	10/2009	Kang et al.
2008/0114690 A1	5/2008 Skidmore et al.			Jeide et al. Willis G06F 17/30017
2008/0114881 A1 2008/0125225 A1	5/2008 Lee et al. 5/2008 Lazaridis et al.	2009/0280300 AI	11/2009	455/466
2008/0130663 A1	6/2008 Fridman et al.		11/2009	Banavar et al.
2008/0133326 A1 2008/0133603 A1	6/2008 Goncalves et al. 6/2008 Fischer et al.			Fok et al. Holloway et al.
2008/0133641 A1	6/2008 Gent et al.	2009/0318171 A1	12/2009	Backholm et al.
2008/0133708 A1	6/2008 Alvarado et al.		12/2009	Wang Backholm
2008/0133729 A1 2008/0134292 A1	6/2008 Fridman et al. 6/2008 Ariel et al.	2010/0042691 A1		Maguire
2008/0140665 A1	6/2008 Ariel et al.	2010/0057924 A1		Rauber et al.
2008/0151817 A1 2008/0154870 A1	6/2008 Fitchett et al. 6/2008 Evermann et al.	2010/0064341 A1*	3/2010	Aldera H04L 63/102 726/1
2008/0155613 A1	6/2008 Benya et al.	2010/0077035 A1		Li et al.
2008/0168145 A1	7/2008 Wilson	2010/0077083 A1 2010/0087167 A1		Tran et al. Tsurutome et al.
2008/0192820 A1 2008/0198995 A1	8/2008 Brooks et al. 8/2008 McGary et al.	2010/0087107 A1 2010/0087184 A1		Stoev et al.
2008/0201362 A1	8/2008 Multer et al.	2010/0088722 A1	4/2010	
2008/0201751 A1 2008/0204921 A1	8/2008 Ahmed et al. 8/2008 Takahashi et al.	2010/0115050 A1 2010/0131593 A1		Sultenfuss et al. Kihara et al.
2008/0204921 A1 2008/0207182 A1	8/2008 Maharajh et al.	2010/0131617 A1		Osborne et al.
2008/0209491 A1	8/2008 Hasek	2010/0146107 A1 2010/0174735 A1	6/2010	
2008/0214148 A1 2008/0216094 A1	9/2008 Ramer et al. 9/2008 Anderson et al.	2010/01/4/33 A1 2010/0174939 A1	7/2010 7/2010	
2008/0220797 A1	9/2008 Meiby et al.	2010/0192170 A1		Raleigh
2008/0232290 A1 2008/0233983 A1	9/2008 Elzur et al. 9/2008 Park et al.	2010/0211651 A1 2010/0250695 A1		Guedalia et al. Shenfield et al.
2008/0233983 AT 2008/0270379 AT	10/2008 Ramakrishna	2010/0274922 A1		Reavely
2008/0273498 A1	11/2008 Jalil et al.	2010/0279662 A1		Kuusinen et al.
2008/0274761 A1 2008/0281798 A1	11/2008 Block et al. 11/2008 Chatterjee et al.			Muthiah et al. Jorgensen
2008/0288659 A1	11/2008 Hasha et al.	2010/0319054 A1	12/2010	Mehta et al.
2008/0298386 A1 2008/0299956 A1	12/2008 Fiatal 12/2008 Bailey et al.	2011/0016195 A1 2011/0019627 A1		Kaplan et al. Krishnaswamy et al.
2008/0299936 AT 2008/0301231 AT	12/2008 Balley et al. 12/2008 Mehta et al.	2011/0019027 A1 2011/0040718 A1		Tendjoukian et al.
2008/0301300 A1	12/2008 Toub	2011/0065419 A1	3/2011	Book et al.
2008/0307219 A1 2008/0313282 A1	12/2008 Karandikar 12/2008 Warila et al.	2011/0065424 A1 2011/0113109 A1		Estevez et al. LeVasseur et al.
2009/0012841 A1	1/2009 Warna et al.	2011/0113109 A1 2011/0138402 A1		Fleming
				-

(56)	Refere	nces Cited	WO WO 2007/015726 A1 2/2007
	U.S. PATENT	DOCUMENTS	WO WO 2007/149526 A2 12/2007 WO WO 2007/149540 A2 12/2007
			WO WO 2011/126889 A2 10/2011 WO WO 2012/018430 A1 2/2012
		Einarsson et al. Fiatal et al.	WO WO 2012/018430 A1 2/2012 WO WO 2012/018431 A1 2/2012
		Van Geest et al.	WO WO 2012/018477 A2 2/2012
		Fleming	WO WO 2012/018479 A2 2/2012 WO WO 2012/018556 A2 2/2012
		Hubert Fiatal	WO WO 2012/024030 A2 2/2012
2011	/0191474 A1 8/2011	Fiatal	
		Sutaria et al. van Gent et al.	OTHER PUBLICATIONS
		Li et al.	Andraid Davidonara "Data" 10 magas Oct 27 2011
		Saros et al.	Android Developers, "Date," 10 pages, Oct. 27, 2011. Augun, Audrey, "Integrating Lotus Notes With Enterprise Data,"
		Fiatal et al. Niejadlik	Lotus Notes Advisory, pp. 22-25, JulAug. 1996.
2011	/0238772 A1 9/2011	Fiatal	Balaban, Bob, "This Is Not Your Fathers Basic: LotusScript in
	/0246950 A1 10/2011 /0252088 A1 10/2011	Luna et al. Fiatal	Notes Release 4," The View, vol. 1, Issue 5, 32 pages, NovDec.
		Vargas et al.	1995. Bedell, Doug, "Meeting Your New Best Friends Six Degrees
		Knowles et al.	Widens Your Contacts in Exchange for Sampling Web Sites," The
	/0264905 A1     10/2011 /0294463 A1     12/2011	Ovsiannikov Fiatal	Dallas Morning News, 4 pages, Oct. 27, 1998.
2011	/0294464 A1 12/2011	Fiatal	Bergman, Lawrence D. et al., "Programming-By-Demonstration for
		Snyder Beppler et al.	Behavior-Based User Interface Customization," IBM Research Report, RC23116, 5 pages, Feb. 20, 2004.
	2/0005276 A1 1/2012	Guo et al.	B'Far, Reza et al., "Designing Effective User Interfaces for Wireless
		Backholm et al.	Devices," Publication Unknown, 14 pages, Published prior to Feb.
		Petersen et al. Backholm et al.	23, 2006. Blaney, Jeff, "You Can Take It With You—An Introduction to
2012	2/0221652 A1 8/2012	Saino et al.	Mobile Computing With Notes R4," The View, vol. 2, Issue 1, 14
	2/0254417 A1 10/2012 5/0064120 A1 3/2013	Luna Bodog et al.	pages, JanFeb. 1996.
2013	/0346312 A1 12/2013	Calabrese et al.	Braden, R., "Requirements for Internet Hosts—Application and
2014	/0025953 A1 1/2014	Venters et al.	Support," RFC 1123, 80 pages, Oct. 1989. Brown, Kevin et al., "Mastering Lotus Notes®," Sybex Inc., 996
	FOREIGN PATE	ENT DOCUMENTS	pages, 1995. "Chapter: About NotesPump," Publication Unknown, 480 pages,
EP EP	1422899 A1 1466261 A1	5/2004 10/2004	Published prior to Jan. 8, 2003. "Chapter 13-1—Anatomy of a Note ID," Publication Unknown, 8
EP	1466435 A1	10/2004	pages, Published prior to Jan. 8, 2003.
EP	1482702 A1	12/2004	Cole, Barb et al., "Lotus Airs Notes-To-Database Integration Tool,"
EP EP	1815634 A1 1815652 A1	8/2007 8/2007	Network World, 2 pages, Oct. 2, 1995.  "CR 3483 to Release 8 TS 25.331, Rev. 2," 3GPP TSG-RAN2
EP	1817883 A1	8/2007	Meeting #64, Prague, Czech Republic, 11 pages, Nov. 10-14, 2008.
FI FI	117152 B 118288 B	6/2006 9/2007	"CR 4100 to Release 8 TS 25.331, Rev. 1," 3GPP TSG-RAN WG2
FI	119581 B	12/2008	Meeting #69, San Francisco, U.S., 6 pages, Feb. 22-26, 2010. Dahl, Andrew, "Lotus Notes® 4 Administrator's Survival Guide,"
JP JP	4154233 A 10-336372 A	5/1992 12/1998	Sams Publishing, 64 pages, 1996.
JР	2001-218185 A	8/2001	Decker, Stefan et al., "The Social Semantic Desktop," Digital
JP	2001-350718 A	12/2001	Enterprise Research Institute, DERI Technical Report 2004-05-02, 7 pages, May 2004.
JP JP	2001-356973 A 2005-515664 T	12/2001 5/2005	Elz, R. et al., "Clarifications to the DNS Specification," RFC 2181,
JР	2009-207177 A	9/2009	12 pages, Jul. 1997.
JP KR	4386732 B2 2001-0018568 A	10/2009 3/2001	European Patent Application No. EP 03705704.9, Supplementary European Search Report, 4 pages, Jun. 9, 2010.
KR	2007-0071858 A1	7/2007	European Patent Application No. EP 03707338.4, Supplementary
KR WO	2009-0077515 A WO 97/41661 A2	7/2009 11/1997	European Search Report, 2 pages, Apr. 18, 2011.
WO	WO 98/24257 A1	6/1998	European Patent Application No. EP 05815115.0, Supplementary European Search Report, 7 pages, Nov. 17, 2011.
WO WO	WO 98/58322 A2	12/1998	Falkner, Mike, "How to Plan, Develop, and Implement Lotus
WO	WO 01/30130 A2 WO 03/007570 A1	5/2001 1/2003	Notes® in Your Organization," John Wiley & Sons, Inc., 539 pages,
WO	WO 03/058483 A1	7/2003	1996.
WO WO	WO 03/058879 A1 WO 03/065701 A1	7/2003 8/2003	Freeland, Pat et al., "Lotus Notes 3-3.1 for Dummies™," IDG Books Worldwide, 389 pages, 1994.
WO	WO 03/098890 A1	11/2003	Frenkel, Garry, "Pumping for Info: Notes and Database Integra-
WO WO	WO 2004/017591 A2 WO 2004/045171 A1	2/2004 5/2004	tion," Network Computing, 10 pages, May 1, 1996.
WO	WO 2005/015925 A2	2/2005	Gameline, Advertisement, 1 page, 1982. Gewirtz, David, "Lotus Notes 3 Revealed!," Prima Publishing, 261
WO	WO 2005/020108 A1	3/2005 4/2006	pages, 1994.
WO WO	WO 2006/045005 A1 WO 2006/045102 A2	4/2006 4/2006	Grous, Paul J., "Creating and Managing a Web Site With Lotus
WO	WO 2006/053952 A1	5/2006	Internotes Web Publisher," The View, vol. 1, Issue 4, 20 pages, SepOct. 1995.
WO WO	WO 2006/053954 A1 WO 2006/058967 A1	5/2006 6/2006	GSM Association, "Network Efficiency Task Force Fast Dormancy
wo	WO 2007/015725 A2	2/2007	Best Practices," V1.0, 21 pages, May 26, 2010.

Page 10

#### (56)References Cited

#### OTHER PUBLICATIONS

Haas, Zygmunt J. et al., "Mobile-TCP: An Asymmetric Transport Protocol Design for Mobile Systems," IEEE, pp. 1054-1058, 1997. Haas, Zygmunt J. et al., "The Design and Performance of Mobile TCP for Wireless Networks," Journal of High Speed Networks, vol. 10, pp. 187-207, 2001.

Hajdu, Kalman et al., "Lotus Notes Release 4 in a Multiplatform Environment," IBM Corporation, 173 pages, Feb. 1996.

Hardy, Ed, "Microsoft Proposes Two New Thumb-Driven User Interfaces," Brighthand Consulting, Inc., 2 pages, 2003.

IBM Corporation, "The Architecture of Lotus Notes," White Paper No. 114654, 26 pages, May 31, 1995.

IBM Corporation, "The History of Notes and Domino," Lotus Developer Domain, 11 pages, Sep. 29, 2003.

ImTOO, "ImTOO iPod Movie Converter," 3 pages, Nov. 9, 2005. IntelliLink Corporation, "IntelliLink® for Windows User's Guide," Version 3.0, 167 pages, 1994.

International Application No. PCT/US2003/000618, International Search Report, 1 page, Apr. 4, 2003.

International Application No. PCT/US2003/000624, International Search Report, 2 pages, May 13, 2003.

International Application No. PCT/US2005/037702, International Preliminary Examination Report, 6 pages, Nov. 20, 2007.

International Application No. PCT/US2005/037702, International Search Report, 1 page, Nov. 5, 2007.

International Application No. PCT/US2005/037702, Written Opinion, 6 pages, Nov. 5, 2007.

International Application No. PCT/US2005/038135, International Search Report, 2 pages, Aug. 8, 2008.

International Application No. PCT/US2005/038135, Written Opinion, 8 pages, Aug. 8, 2008.

International Application No. PCT/US2005/038135, International Preliminary Report on Patentability, 9 pages, Oct. 31, 2011.

International Application No. PCT/FI2005/050424, International Search Report, 4 pages, Mar. 2, 2006.

International Application No. PCT/FI2005/050426, International Search Report, 3 pages, Mar. 1, 2006.

International Application No. PCT/FI2005/050441, International Search Report, 3 pages, Mar. 1, 2006.

International Application No. PCT/US2006/023426, International Search Report, 1 page, Feb. 21, 2007.

International Application No. PCT/US2006/023427, International Search Report, 1 page, Oct. 12, 2006.

International Application No. PCT/US2007/014462, International Search Report, 1 page, Jul. 2, 2008.

International Application No. PCT/US2007/014497, International Search Report, 1 page, Aug. 25, 2008.

International Application No. PCT/US2011/030534, International

Search Report, 10 pages, Dec. 29, 2011. International Application No. PCT/US2011/037932, International

Search Report, 9 pages, Jan. 2, 2012. International Application No. PCT/US2011/037943, International

Search Report, 11 pages, Jan. 2, 2012.

International Application No. PCT/US2011/043322, International Search Report, 9 pages, Feb. 9, 2012.

International Application No. PCT/US2011/043328, International Search Report, 12 pages, Feb. 27, 2012.

International Application No. PCT/US2011/043409, International Search Report, 11 pages, Feb. 9, 2012.

Japanese Patent Application No. 2003-558726, Office Action, 2 pages, Jun. 10, 2008.

Karlson, Amy K. et al., "AppLens and LaunchTile: Two Designs for One-Handed Thumb Use on Small Devices," Proceedings of CHI 2005, 10 pages, Apr. 2-7, 2005.

Kent, S. et al., "Security Architecture for the Internet Protocol," RFC 2401, The Internet Society, 62 pages, Nov. 1998.

Kleinberg, Jon, "The Small-World Phenomenon: An Algorithmic Perspective," Cornell Computer Science Technical Report 99-1776, 14 pages, Oct. 1999.

Koeppel, Dan, "GUIs Just Want to Have Fun," Wired Magazine, Issue 8.10, 12 pages, Oct. 2000.

Kornblith, Polly Russell, "Lotus Notes Answers: Certified Tech Support," Covers Release 3, McGraw-Hill, Inc., 326 pages, 1994. Kreisle, Bill, "Teach Yourself . . . Lotus Notes 4," MIS Press, 464 pages, 1996.

Lamb, John P. et al., "Lotus Notes Network Design," McGraw-Hill, 278 pages, 1996.

Londergan, Stephen et al., "Lotus Notes® Release 4 for Dummies®," IDG Books Worldwide, 229 pages, 1996.

Lotus Development Corporation, "Firewall Security Overview and How Firewalls Relate to Lotus Notes," Lotus Notes Knowledge Base, 9 pages, May 22, 1996.

Lotus Development Corporation, "How to Set Up 'Firewall' Protection for a Notes Domain," Lotus Notes Knowledge Base, 2 pages, Nov. 6, 1995.

Lotus Development Corporation, "Lotus Announces Lotus NotesPump 1.0," Lotus Notes Knowledge Base, 6 pages, Oct. 31,

Lotus Development Corporation, "Lotus Inside Notes-The Architecture of Notes and the Domino Server." 207 pages, 2000.

Lotus Development Corporation, "Lotus NotesPump 1.0 Q & A," Lotus Notes Knowledge Base, 3 pages, Oct. 31, 1995.

Lotus Development Corporation, "Lotus NotesPump: Database Integration for Lotus Notes," Lotus Notes Knowledge Base, 5 pages, Oct. 31, 1995.

Lotus Development Corporation, "Lotus Notes Administration," Release 3.3, 20 pages, 1995.

Lotus Development Corporation, "Lotus Notes Administrator's Guide," Release 4, 499 pages, 1995

Lotus Development Corporation, "Lotus Notes Administrator's Guide—Server for NetWare, OS-2, and Unix," Release 3.1, 509

Lotus Development Corporation, "Lotus Notes Administrator's Guide—Server for Windows," Release 3.1, 345 pages, 1994.

Lotus Development Corporation, "Lotus Notes Application Developer's Guide," Release 4, 475 pages, 1995.

Lotus Development Corporation, "Lotus Notes Customer Service Application Guide," Release 3.1, 46 pages, 1994.

Lotus Development Corporation, "Lotus Notes Customer Support Guide," 33 pages, Published prior to Jan. 8, 2003.

Lotus Development Corporation, "Lotus Notes Customer Support Guide-North American Guide," Release 4.1, 51 pages, Published prior to Jan. 8, 2003.

Lotus Development Corporation, "Lotus Notes Database Manager's Guide," Release 4, 115 pages, 1995.

Lotus Development Corporation, "Lotus Notes Deployment Guide," Release 4, 104 pages, 1995.

Lotus Development Corporation, "Lotus Notes for Windows, OS-2, and Macintosh," Release 3.3, 89 pages, 1995.

Lotus Development Corporation, "Lotus Notes Getting Started With Application Development," Release 3.1, 151 pages, 1994.

Lotus Development Corporation, "Lotus Notes Install Guide for Servers," Release 4, 68 pages, 1996.

Lotus Development Corporation, "Lotus Notes Install Guide for Workstations," Release 4, 28 pages, 1995.

Lotus Development Corporation, "Lotus Notes Install Guide for Workstations," Release 4.1, 67 pages, 1996.

Lotus Development Corporation, "Lotus Notes Install Guide for Workstations," Release 4.5, 81 pages, 1996.

Lotus Development Corporation, "Lotus Notes Internet Cookbook for Notes Release 3," 21 pages, Jan. 16, 1996.

Lotus Development Corporation, "Lotus Notes Internet Cookbook for Notes Release 4," 35 pages, Feb. 14, 1996.

Lotus Development Corporation, "Lotus Notes Internotes Web

Navigator Administrator's Guide," Release 4, 60 pages, 1995. Lotus Development Corporation, "Lotus Notes Internotes Web

Navigator User's Guide," Release 4, 56 pages, 1995. Lotus Development Corporation, "Lotus Notes Internotes Web

Publisher Guide," Release 4, 122 pages, 1996. Lotus Development Corporation, "Lotus Notes LotusScript Classes

for Notes," Release 4, 6 pages, Published prior to Jan. 8, 2003.

Page 11

#### (56) References Cited

#### OTHER PUBLICATIONS

Lotus Development Corporation, "Lotus Notes Migration Guide," Release 4, 110 pages, 1996.

Lotus Development Corporation, "Lotus Notes Network Configuration Guide," Release 4.5, 121 pages, 1996.

Lotus Development Corporation, "Lotus Notes Network Driver Documentation," Release 3.1, 100 pages, 1994.

Lotus Development Corporation, "Lotus Notes Programmer's Guide—Part 1," Release 4, 614 pages, 1995.

Lotus Development Corporation, "Lotus Notes Programmer's Guide—Part 2," Release 4, 462 pages, 1995.

Lotus Development Corporation, "Lotus Notes Quick Reference for Application Developers," Release 3, 6 pages, Published prior to Jan. 8, 2003

Lotus Development Corporation, "Lotus Notes Quick Reference for Macintosh," Release 3, 6 pages, Published prior to Jan. 8, 2003.

Lotus Development Corporation, "Lotus Notes Quick Reference for SmartIcons," Release 3.1, 4 pages, Published prior to Jan. 8, 2003. Lotus Development Corporation, "Lotus Notes Quick Reference for Windows and Presentation Manager," Release 3, 6 pages, Published prior to Jan. 8, 2003.

Lotus Development Corporation, "Lotus Notes Release Notes," Release 4, 139 pages, 1995.

Lotus Development Corporation, "Lotus Notes Release Notes,"

Release 4.1, 197 pages, 1996. Lotus Development Corporation, "Lotus Notes Server for Windows," Release 3.3, 7 pages, 1994.

Lotus Development Corporation, "Lotus Notes Server Up and Running!," Release 4, 13 pages, 1996.

Lotus Development Corporation, "Lotus Notes Site and Systems

Planning Guide," Release 3.1, 169 pages, 1994. Lotus Development Corporation, "Lotus Notes Start Here—Work-

station Install for Windows, OS-2 and Macintosh," Release 3.3, 47 pages, 1995.

Lotus Development Corporation, "Lotus Notes Step by Step—A Beginner's Guide to Lotus Notes," Release 4, 179 pages, 1995.

Lotus Development Corporation, "Lotus Notes Step by Step—A Beginner's Guide to Lotus Notes," Release 4.1, 167 pages, 1996. Lotus Development Corporation, "Lotus Software Agreement," 8 pages, Published prior to Jan. 8, 2003.

Lotus Development Corporation, "What Is the Notes Replicator?," Lotus Notes Knowledge Base, 8 pages, Jul. 5, 1995.

"Lotus Notes Advisor," Advisor Publications Inc., 55 pages, Jun. 1995.

"Lotus Notes Advisor," Advisor Publications Inc., 55 pages, Aug. 1995.

"Lotus Notes Advisor," Advisor Publications Inc., 55 pages, Oct.

"Lotus Notes Advisor," Advisor Publications Inc., 55 pages, Dec.

"Lotus Notes Advisor," Advisor Publications Inc., 63 pages, Jan.-Feb. 1996.

"Lotus Notes Advisor," Advisor Publications Inc., 55 pages, Apr.

"Lotus Notes Advisor," Advisor Publications Inc., 55 pages, Jun.

"Lotus Notes Advisor," Advisor Publications Inc., 55 pages, Aug. 1996.

"Lotus Notes Advisor," Advisor Publications Inc., 55 pages, Oct. 1996.

"Lotus Notes Advisor," Advisor Publications Inc., 63 pages, Dec. 1996

"Lotus Notes—Notes Administration Help," Screen Shots, 17 pages, Published prior to Jan. 8, 2003.

MacGregor, Rob et al., "The Domino Defense: Security in Lotus Notes and the Internet," IBM Corporation, 183 pages, Dec. 1997. Maltz, David A. et al., "MSOCKS: An Architecture for Transport Layer Mobility," IEEE, pp. 1037-1045, 1998.

Marmel, Elaine, "Easy Lotus® Notes Release 4.0," Que Corporation, 237 pages, 1996.

Mason, Luke, "Windows XP: New GUI Design Shows Skin Is In," TechRepublic, 4 pages, Apr. 4, 2001.

McMullen, Melanie, "Network Remote Access and Mobile Computing," Miller Freeman Inc., 226 pages, 1994.

Microsoft, Definition of "Access," Microsoft Computer Dictionary, Fifth Edition, 2 pages, May 1, 2002.

Microsoft, Definition of "Synchronization," Microsoft Computer Dictionary, Fifth Edition, 2 pages, May 1, 2002.

Milgram, Stanley, "The Small-World Problem," Psychology Today, vol. 2, pp. 60-67, 1967.

Miller, Victor S., "Use of Elliptic Curves in Cryptography," Advances in Cryptology—CRYPTO '85 Proceedings, vol. 218, pp. 417-426, 1985.

Mockapetris, P., "Domain Names—Concepts and Facilities," RFC 1034, 43 pages, Nov. 1987.

Mockapetris, P., "Domain Names—Implementation and Specification," RFC 1035, 43 pages, Nov. 1987.

Myers, Brad A. et al., "Extending the Windows Desktop Interface With Connected Handheld Computers," WSS'00 Proceedings of the 4th Conference on USENIX Windows Systems Symposium, vol. 4, 10 pages, 2000.

Myers, Brad A. et al., "User Interfaces That Span Hand-Held and Fixed Devices," CHI'2001 Workshop on Distributed and Disappearing User Interfaces in Ubiquitous Computer, 4 pages, 2001.

National Institute of Standards and Technology, "Advanced Encryption Standard (AES)," Federal Information Processing Standards Publication 197, 52 pages, Nov. 26, 2001.

National Institute of Standards and Technology, "Secure Hash Standard," Federal Information Processing Standards Publication 180-2, 83 pages, Aug. 1, 2002.

Netscape Communications Corporation, "Netscape Mail Server Administrator's Guide," Version 2.0, 172 pages, 1996.

Netscape Communications Corporation, "Netscape Mail Server Installation Guide," Version 2.0 for Unix, 62 pages, 1996.

Netscape Communications Corporation, "Netscape Mail Server User's Guide," Version 2.0, 35 pages, 1996.

Netscape Communications Corporation, "Netscape News Server Administrator's Guide for Windows NT," Version 2.0, 119 pages, 1006

Niederée, Claudia et al., "A Multi-Dimensional, Unified User Model for Cross-System Personalization," Proceedings of the AVI 2004 Workshop on Environments for Personalized Information Access, 11 pages, 2004.

Nokia, "Developer Platforms," 3 pages, 2005.

"NotesPump 1.0 Release Notes," Publication Unknown, 8 pages, Published prior to Jan. 8, 2003.

Opyt, Barbara et al., "Use the Internet As Your Lotus Notes WAN," Lotus Notes Advisor, pp. 17-20, Nov.-Dec. 1996.

Ortiz, C. Enrique, "An Introduction to the Symbian  $OS^{TM}$  Platform for Palm OS® Developers," Metrowerks Corp., 21 pages, 2002.

"Overview—What Is Lotus NotesPump?," Publication Unknown, 88 pages, Published prior to Jan. 8, 2003.

Perez, Sarah, "Onavo's Data-Compressing Mobile App Raises \$10 Million Series B From Horizons, Motorola Ventures," 2 pages, Jan. 24, 2012.

Phillips, Joshua et al., "Modeling the Intelligence Analysis Process for Intelligent User Agent Development," Research and Practice in Human Resource Management, vol. 9, No. 1, pp. 59-73, 2001.

Pyle, Hugh, "The Architecture of Lotus Notes," Lotus Notes Advisor, Premiere Issue, pp. 18-27, 1995.

Pyle, Lisa, "A Jump Start to the Top Ten R3-To-R4 Migration Considerations," The View, vol. 1, Issue 5, 22 pages, Nov.-Dec. 1995

Qualcomm Incorporated, "Managing Background Data Traffic in Mobile Devices," 16 pages, Jan. 2012.

Qualcomm, "System Parameter Recommendations to Optimize PS Data User Experience and UE Battery Life," 80-W1112-1, Revision B, 9 pages, Mar. 2007.

Ringel, Meredith et al., "iStuff: A Scalable Architecture for Light-weight, Wireless Devices for Ubicomp User Interfaces," Proceedings of UbiComp 2002, 2 pages, 2002.

Shafran, Andrew Bryce, "Easy Lotus Notes® for Windows<sup>TM</sup>," Que Corporation, 199 pages, 1994.

Page 12

#### (56) References Cited

#### OTHER PUBLICATIONS

Signorini, Eugene, "SEVEN's Service-Based Wireless Solutions Enable Enterprises to Untether E-Mail," Wireless/Mobile Enterprise & Commerce, 16 pages, Oct. 2004.

Swedeen, Bret et al., "Under the Microscope—Domino Replication," LDD Today, 8 pages, Oct. 1, 1998.

Tamura, Randall A., "Lotus® Notes $^{TM}$  4 Unleashed," Sams Publishing, 928 pages, 1996.

U.S. Appl. No. 60/663,463, File History, 113 pages, Mar. 18, 2005. Vivacqua, Adriana et al., "Profiling and Matchmaking Strategies in Support of Opportunistic Collaboration," CoopIS/DOA/ODBASE 2003, LNCS 2888, pp. 162-177, 2003.

Wainwright, Andrew, "Secrets to Running Lotus Notes: The Decisions No One Tells You How to Make," IBM Corporation, 193 pages, Oct. 1996.

Wilcox, Adam A., "PC Learning Labs Teaches Lotus Notes 3.0," Ziff-Davis Press, 381 pages, 1993.

Wong, Harry, "Casahl's Replic-Action: Delivering True Notes—DBMS Integration," The View, vol. 2, Issue 1, pp. 33-50, Jan.-Feb. 1996

Office Action for U.S. Appl. No. 13/208,200 dated Oct. 15, 2014. Office Action Dated May 9, 2014 for U.S. Appl. No. 13/427,748 filed Mar. 22, 2012.

Office Action Dated May 7, 2014 for U.S. Appl. No. 13/208,185 filed Aug. 11, 2011.

Office Action Dated Mar. 10, 2014 for U.S. Appl. No. 13/208,200 filed Aug. 11, 2011.

Non-Final Office Action mailed Apr. 15, 2015 for U.S. Appl. No. 13/547.001.

Non-Final Office Action mailed Feb. 6, 2015 for U.S. Appl. No. 14/468.265.

Final Office Action mailed Feb. 20, 2015 for U.S. Appl. No. 13/178,675.

USPTO, Non-Final Rejection for U.S. Appl. No. 14/873,156, Jan. 20, 2016.

USPTO, Non-Final Rejection for U.S. Appl. No. 14/468,272, Jan. 14, 2016.

Non-Final rejection mailed Aug. 19, 2015 for U.S. Appl. No. 13/560,092.

Peter Saint-Andre: "Extensible Messaging and Presence Protocol (XMPP): Core", Jabber Software Foundation, Oct. 2004, available at https://tools.ietf.org/html/rfc3920.

Peter Saint-Andre: "Extensible Messaging and Presence Protocol (XMPP): Instant Messaging and Presence", Jabber Software Foundation, Oct. 2004, available at https://tools.ietf.org/html/rfc3921.

USPTO, Notice of Allowance for U.S. Appl. No. 14/583,726, mailed on Jul. 27, 2016.

USPTO, Final Rejection for U.S. Appl. No. 14/468,272, mailed on May 11, 2016.


USPTO, Non-Final Office Action for U.S. Appl. No. 15/247,848, mailed on Nov. 25, 2016.

USPTO, Non-Final Office Action for U.S. Appl. No. 15/275,986, mailed on Dec. 29, 2016.

\* cited by examiner


Jul. 18, 2017

Sheet 1 of 4

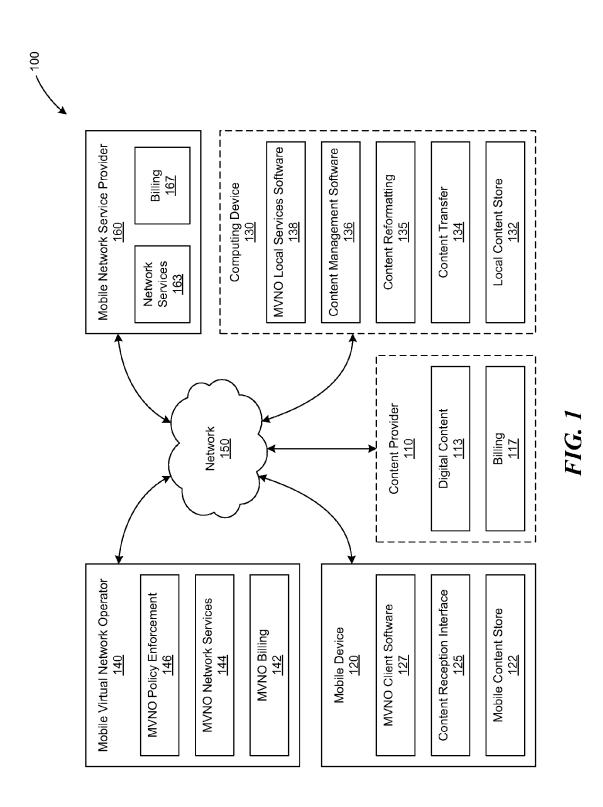

Jul. 18, 2017


Sheet 2 of 4

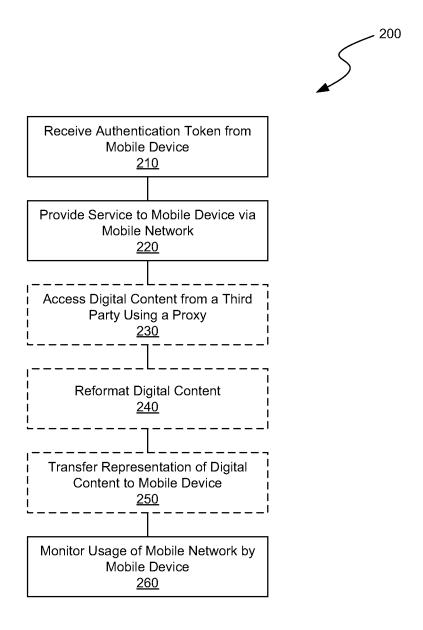

**FIG.** 2

Jul. 18, 2017


Sheet 3 of 4

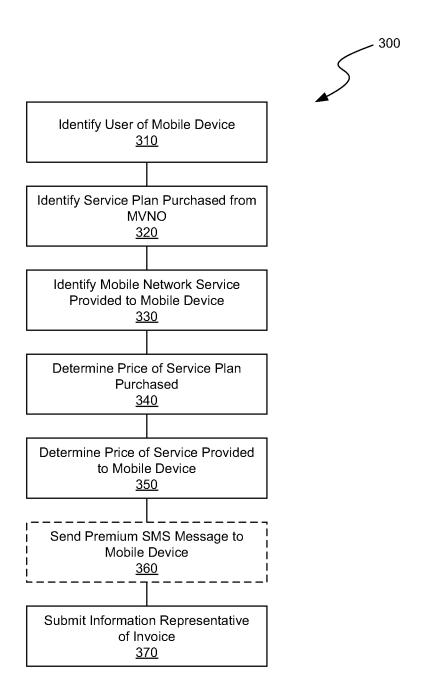

**FIG.** 3

Jul. 18, 2017

Sheet 4 of 4

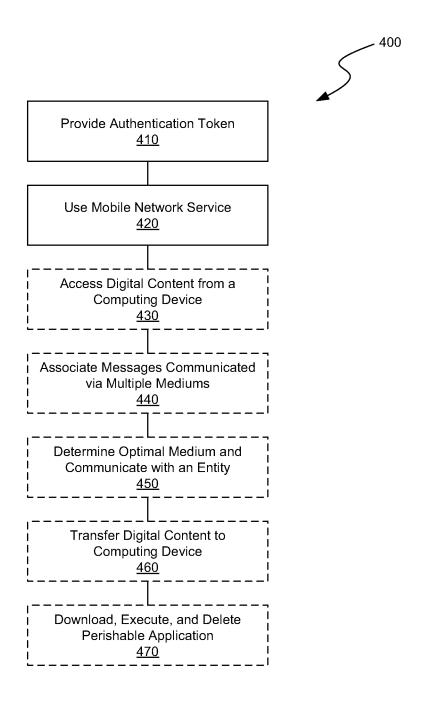

**FIG.** 4

1

### MOBILE DEVICE CONFIGURED FOR COMMUNICATING WITH ANOTHER MOBILE DEVICE ASSOCIATED WITH AN ASSOCIATED USER

## CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a divisional of U.S. patent application Ser. No. 13/208,200 entitled "System and Method for Providing a Network Service in a Distributed Fashion to a Mobile Device" and filed on Aug. 11, 2011, which is a continuation of U.S. patent application Ser. No. 12/008,710 entitled "Mobile Virtual Network Operator" and filed on Jan.  $_{15}$ 11, 2008, now U.S. Pat. No. 8,107,921 issued on Jan. 31, 2012, which is related to co-pending U.S. patent application Ser. No. 12/002,300 entitled "Content Delivery to a Mobile Device from a Content Service" and filed on Dec. 13, 2007. This application is also related to co-pending U.S. patent 20 application Ser. No. 11/729,314 entitled "System and Method for Group Management" and filed on Mar. 27, 2007. This application is also related to co-pending U.S. patent application Ser. No. 13/208,185 entitled "Mobile Virtual Network Operator" and filed on Aug. 11, 2011. The disclo- 25 sures of each co-pending application are incorporated herein by reference.

#### **BACKGROUND**

Field of the Invention

The present invention generally relates to the field of wireless mobile device network services. More specifically, the present invention relates to providing network services to a mobile device over a mobile network.

Description of the Background Art

Mobile devices may be used to communicate using a variety of communication mediums over a mobile network, including voice telephone calls, voice mail, email, and text messaging. In addition, a variety of services may be provided over a mobile network such as content from web sites and other providers. For example, digital content such as ring-tones may be provided over a mobile network. Typically, the multiple communication mediums, network services, and digital content are provided by different entities 45 whereby interaction and integration may not easily occur.

Providers of network services often desire to offer a bundled package of media and network services to customers under a single brand. However, unless the provider is also a mobile network service provider, the provider of the 50 network services may have difficulty in providing an integrated mobile network service offering to its customers to meet their needs.

#### **SUMMARY**

Systems and methods for a mobile virtual network operator to overcome problems in the prior art related to providing mobile network services are provided. The mobile virtual network operator may provide unique content, services, policies, and pricing for mobile network services while utilizing and operating over a mobile network provided by a mobile network service provider. The mobile virtual network operator may brand and bill its services independently from the mobile network service provider. The mobile virtual network operator may bundle network services, communication services, and digital content delivery

2

in an integrated fashion that enables interoperability and seamless communications across multiple mediums.

A system for providing mobile network services includes a first server in communication with a mobile device over a mobile network. The first server is configured to receive a unique authentication token from the mobile device over the mobile network. The first server is further configured to provide a service to the mobile device via the mobile network. The provided service is associated with the unique authentication token and branded by an entity other than an operator of the mobile network. A second server is in communication with the mobile network. The second server is configured to monitor usage of the mobile network by the mobile device. The usage is related to the service provided to the mobile device by the first server.

A method for providing a mobile network service includes receiving a unique authentication token from a mobile device at a server, providing a service to the mobile device via a mobile network, and monitoring usage of the mobile network by the mobile device. The server is in communication with the mobile device over the mobile network. The service is associated with the unique authentication token and branded by an entity other than an operator of the mobile network. The usage is related to the service provided to the mobile device via the mobile network.

A method of billing for a mobile network service provided to a mobile device by a mobile virtual network operator includes identifying a user of the mobile device. The method also includes identifying a service plan purchased from the mobile virtual network operator. The service plan is purchased by the user of the mobile device. The method also includes identifying a mobile network service provided to the mobile device via a mobile network. The mobile network service is provided on behalf of the mobile virtual network operator. The method also includes determining a price of the service plan purchased by the user of the mobile device and a price of the network service provided to the mobile device via the mobile network. The method further includes submitting information representative of an invoice for the service plan purchased and the network service provided to the mobile device. The user is billed on behalf of the mobile network service provider by the mobile virtual network operator.

A computer program is stored on a computer readable storage medium. The program is executable by a processor for performing a method for providing a mobile network service. The method includes providing a unique authentication token from a mobile device to a server and using a service provided by the server via a mobile network. The server is in communication with the mobile device over the mobile network. The service is associated with the unique authentication token and branded by an entity other than an operator of the mobile network. The method further includes downloading a representation of digital content stored at a computing device in communication with the server over a network. The download is responsive to the unique authentication token provided to the server, and the computing device is controlled by an entity other than an entity that operates the mobile network or the server.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an illustration of a mobile virtual network.

FIG. 2 is a flowchart depicting a method of operating a mobile virtual network.

FIG. 3 is a flowchart depicting a billing method for a mobile virtual network operator.

3

FIG. 4 is a flowchart depicting a method of using a service provided by a mobile virtual network operator.

#### DETAILED DESCRIPTION

FIG. 1 is an illustration of a mobile virtual network 100. The mobile virtual network 100 includes a mobile virtual network operator 140 (which may include a server), a mobile network service provider 160, a mobile device 120, an optional personal computing device 130, and an optional 10 content provider 110. All of the aforementioned may be interconnected through network 150. The content provider 110, the personal computing device 130, the mobile virtual network operator 140; and the mobile network service provider 160 may include or use computing devices inclusive of a computer processor, memory, computer readable data storage media, network interfaces, and input/output devices such as a video display, keyboard, mouse, touchpad, touch screen, and so forth.

The mobile virtual network operator 140 may include one 20 or more service or processing nodes configured to perform one or more functions of the mobile virtual network operator 140. The mobile virtual network operator 140 may also include a proxy for another service or processing node configured to perform one or more functions of the mobile 25 virtual network operator 140. Each of the one or more nodes of the mobile virtual network operator 140 may independently operate and connect to the network 150. The mobile network service provider 160, the optional content provider 110, and the optional personal computing device 130 may be 30 configured in a similar fashion.

The mobile device 120 may be configured to communicate between a user and other mobile devices as well as one or more computing devices over the network 150. The mobile device 120 may include a cellular telephone, a smart 35 phone, a personal digital assistant (PDA), a wireless e-mail device, or a handheld computer. The mobile device 120 may include communications components (not shown) such as a radio frequency (RF) antenna, an optical transceiver (e.g., infrared), modulator/demodulator, and codec circuitry con- 40 figured to interface with the network 150 and exchange data over the same. The mobile device 120 may include input/ output components such as a display, keypad, keyboard, touchpad, touch screen, microphone, speaker, headphone jack, Bluetooth interface, speech recognition application, 45 e-mail application, web browser application, MP3 music player, and so forth.

A server at the mobile virtual network operator **140** may provide a service to one or more customers over the network **150**. The one or more customers may be users of the mobile 50 device **120**. The mobile virtual network operator **140** may maintain an account record associated with the user of the mobile device **120**.

The account record may include an identifying element such as a user's customer account number, user ID or user 55 name, password, mobile device electronic serial number (ESN), mobile device telephone number, landline telephone number, credit card number, and so forth. The account record may also include a mobile virtual network service plan, connection information for the user's personal computing device 130, account balance, payment history, mobile network service provider account information, and so forth. The mobile virtual network operator 140 may be configured to receive a unique authentication token from the mobile device 120 over the network 150, the unique authentication token being used to identify and authenticate the user of the mobile device 120 as a customer. The unique authentication

token may include an identifying element included in the user's account record, as disclosed above.

The mobile virtual network operator 140 may include a mobile virtual network operator (MVNO) policy enforcement application 146 configured to enforce a network service policy associated with the user of the mobile device 120. The network service policy may include a maximum number of minutes of voice service per billing period, a maximum number of data bits transferred per billing period, and a maximum number of Short Message Service (SMS) text messages processed per billing period. The network service policy may also include a maximum number of picture or image files transferred per billing period, a maximum number of audio files transferred per billing period, and a maximum number of video files transferred per billing period. The network service policy may further include a maximum number of stored voice mail messages, an amount of utilized server data storage, and so forth. Transferring a file may include downloading the file, uploading the file, transferring a representation of the file, transmitting data representative of the file, and receiving data representative of the file. The functionality of the MVNO policy enforcement application 146 may be distributed or tasked to software running on the personal computing device 130.

The mobile virtual network operator 140 may include an MVNO network services application 144 configured to provide one or more services to the user of the mobile device 120 over the network 150. The one or more network services provided by the MVNO network services application 144 may additionally utilize a network service provided by the mobile network service provider 160. This utilization may occur via the mobile network services application 163. The one or more services may be associated with the unique authentication token and may be branded by the mobile virtual network operator 140 as a separate entity from the mobile network service provider 160. The functionality of the MVNO network services application 144 may be distributed or tasked to software running on a server at the mobile network service provider 160, MVNO client software 127 running on the mobile device 120, the mobile virtual network operator 140, and/or MVNO local services software 138 running on the personal computing device 130.

The mobile network service provider 160 may include a network services application 163 configured to provide mobile network services to the mobile device 120. The mobile network services may include voice communications between the mobile device 120 and another mobile device, landline telephone, computing device, and so forth over the network 150. The voice communications may include two-way communications as well as voice mail. The mobile network services may also include data communications between the mobile device 120 and another mobile device, computing device, or server over the network 150. The data communications may include internet communications, World Wide Web (WWW) communications, file transfers, SMS text message communications, instant messaging (IM) communications, email communications, and so forth.

The mobile network service provider 160 may be configured to monitor, track, and record the mobile device 120's usage of a network service provided by the mobile network services application 163 and/or an MVNO network services application 144. The record of the usage of the network service may be communicated to a billing application 167, an MVNO billing application 142, and an MVNO policy enforcement application 146. The record may be communicated for the purposes of billing the user for the network services used and/or enforcing policies related to using the

network services. A two-way communication between the network services application 163 and the MVNO policy enforcement application 146 may be used to limit network services provided to the mobile device 120 to those that are

146.

The mobile network service provider 160 may also include a billing application 167 configured to facilitate billing the user for mobile network services provided by the network services application 163. Through the billing application 167, the mobile network service provider 160 may also bill the user on behalf of the mobile virtual network operator 140 and/or optional content provider 110.

authorized by the MVNO policy enforcement application 5

The MVNO network services 144 may include a service whereby a user's communications with another person via 15 multiple mediums are associated with one another for easy reference and access via the multiple mediums. The multiple mediums may include SMS text messaging, IM, voice telephone calls, voice over Internet Protocol (IP) communications, email, and multimedia mail. Multiple service 20 providers may also be utilized for each of the multiple mediums.

The mobile virtual network operator 140 may provide a service whereby a user of the mobile device who receives a communication via one medium may respond using a different medium. An incoming message may prompt the user to select a response medium such that the user may choose to respond using the same medium or another medium. For example, the user of the mobile device 120 may receive an SMS text message from a colleague, and respond to the 30 colleague via an email message. The user may respond in a manner similar to responding to the SMS message with another SMS message. In another example, the user may be able to call the colleague by choosing to respond via a voice phone call rather than an SMS message at the response 35 prompt.

The MVNO network services 144 may include a service whereby a user of the mobile device 120 sees a record of communications with a contact that includes multiple mediums within a single list of communications history. The 40 single list of communications history may include communications via SMS text message, IM, email, and voice telephone calls. The record of communications may be organized into a conversation incorporating the multiple mediums. For example, the conversation may include messages exchanged via one or more web email services, one or more personal or enterprise email software packages, one or more IM services, multimedia mail, and so forth.

The MVNO network services 144 may include a service like that described in U.S. application Ser. No. 11/729,314 50 entitled "System and Method for Group Management," whereby an optimal communication medium for the mobile device to communicate with an entity is determined. The entity may have a contact record stored at the mobile device 120. The contact record may include the entity's name, 55 postal address, email address, mobile telephone number, landline telephone number, instant messenger address, and so forth. The mobile virtual network operator 140 may collect contact information for a contact record from sources associated with multiple communication mediums including 60 email software installed on the personal computing device 130, a contacts database on the mobile device 120, a web email service, an instant messaging service, and so forth. The mobile virtual network operator 140 may monitor availability of a contact via one or more communication 65 mediums and inform the user of the mobile device 120 which communication mediums are best to reach the contact

6

at any given time. The best communication medium to reach the contact may also be dependent on the message type the user wishes to send the contact or a time period in which the user wishes to receive a response from the contact.

The MVNO network services 144 may include a broadcast messaging service whereby the mobile device 120 automatically sends a message to multiple contacts within a designated group of contacts, and the mobile virtual network operator 140 forwards the message via a different communication medium to different contacts depending on a determined optimal transmission communication medium for each contact. For example, a user of the mobile device 120 may send a text message to a group of contacts. Some contacts may receive the message via SMS text messaging, others via email, and still others via IM, based upon the determined optimal transmission communication medium for each contact. The optimal transmission communication medium may be determined based upon various factors such as predetermined preferences, presence, activity, and other contact-dependent factors monitored or determined by the mobile virtual network operator 140.

Each recipient contact may respond via an optimal response communication medium. The optimal response communication medium may be the same as or different from the optimal transmission communication medium. Each recipient's optimal response communication medium may be different than another recipient's optimal response communication medium. The broadcast messaging service may include text messaging, peercast, and polling.

The MVNO network services 144 may include a service whereby digital content is delivered to the mobile device 120 from the mobile virtual network operator 140, a digital content provider 110, a computing device 120, or a mobile network service provider 160. The digital content may be delivered over the network 150 based upon a location of the mobile device 120. The mobile virtual network operator 140 may determine the location of the mobile device 120 via a global positioning system (GPS) device at the mobile device 120, triangulation from multiple mobile network service provider base stations receiving a wireless signal from the mobile device 120, or a user input at the mobile device 120. For example, the mobile virtual network operator 140 may send the mobile device 120 a list of restaurants within several blocks of the location of the mobile device 120 based on a location determination.

The MVNO network services 144 may include a service whereby communications routed to the mobile device 120 are sent via an optimal communication medium, a communication medium appropriate for the location of the mobile device 120, or a communication medium determined to be most likely to be successful at contacting the user of the mobile device 120.

The MVNO network services 144 may include a service whereby the mobile device 120 uploads or transfers a representation of digital content to a computing device or server accessible via the network 150. The transfer may be performed in response to a user selection at the mobile device 120 using a proxy at the mobile virtual network Operator 140. This service may be used, for example, to enable the user of the mobile device 120 to publish photographs, videos, audio recordings, messages, and other digital content created or collected at the mobile device 120 to network-accessible computing devices or servers such as web sites or FTP sites, The service may also enable the mobile device 120 to upload digital content to the personal computing device 130 for personal purposes including data backup or transfer.

7

The mobile virtual network operator 140 may enable transfers to be made automatically. In one example, a transfer may be performed each time a photograph is taken at the mobile device 120. In another example, a transfer of data not previously uploaded may be performed at some 5 predetermined time according to a backup schedule. A preference may be set at the mobile device 120 to control what data is uploaded, when the transfer occurs, where the transfer is posted, and so forth. The MVNO network services 144 may include a service whereby a communication via the 10 mobile device 120 is journalled or backed up onto the personal computing device 130.

The MVNO network services 144 may include a service whereby the mobile virtual network operator 140 anticipates data that the user of the mobile device 120 may desire and 15 proactively provides that data to the mobile device 120. The mobile virtual network operator 140 may anticipate data that the user desires based upon a variety of factors. These factors may include preset preferences set by the user, historical pattern of data access by the mobile device 120, or 20 a location of the mobile device 120. The mobile virtual network operator 140 may push the anticipated data to the mobile device 120 via a web interface, an instant message, an SMS text message, an email, or other means of data delivery as known in the art.

The MVNO network services 144 may include a service whereby the mobile virtual network operator 140 performs a function in response to an SMS message sent from the mobile device 120. The function may be performed in response to a command or code contained within the SMS 30 message. The function may include providing requested data to the mobile device 120 or performing processing of data and providing results of the processing to the mobile device 120

The MVNO network services 144 may include a service 35 whereby the mobile virtual network operator 140 proactively provides an advertisement and/or incentive to use mobile network services or access digital content. The advertised services or content may be offered by the mobile virtual network operator 140, a digital content provider 110, 40 or the mobile network service provider 160. The advertisement and/or incentive may be provided via an SMS text message, a perishable application (as described elsewhere herein), or a client applet resident at the mobile device 120.

The MVNO network services 144 may include a service 45 whereby digital content is streamed from the mobile virtual network operator 140 to the mobile device 120. The streamed digital content may originate from the mobile virtual network operator 140. Alternatively, the streamed digital content may be transferred to a server at the mobile 50 virtual network operator 140 from another server over the network 150. The other server may be a digital content provider 110 or a personal computing device 130.

The MVNO network services 144 may include a service whereby a continuous virtual data connection between the 55 mobile device 120 and a server or computing device over the network 150 is maintained even when a connection between the mobile virtual network operator 140 and the mobile device 120 is interrupted. The server or computing device may be digital content provider 110 or personal computing 60 device 130. As an example, the mobile virtual network operator 140 may serve as a proxy for a virtual data connection. The virtual data connection may be a web connection between the mobile device 120 and a server over the network 150. If a network connection between the 65 mobile virtual network operator 140 and the mobile device 120 is temporarily broken, the mobile virtual network opera-

8

tor 140 may continue to maintain an active data connection with the server. The network connection may be broken if the mobile device 120 is turned off or enters a location lacking a sufficient mobile network signal to maintain the network connection. The active data connection between the server and the mobile virtual network operator 140 enables the server to continue to recognize the virtual data connection with the mobile device 120 as being active.

The MVNO network services 144 may include a service whereby perishable software applications and/or digital content are transferred and installed on the mobile device 120 for temporary use. The mobile virtual network operator 140 may transfer and install a perishable application on the mobile device 120 to provide a temporary service to the user of the mobile device 120. After the perishable application is no longer required, the application is automatically deleted. By automatically deleting perishable applications that are no longer needed, memory on the mobile device 120 is freed for other purposes.

The MVNO network services 144 may include a visual voice mail service whereby the MVNO network services 144 stores one or more voice messages for unanswered telephone calls routed to the mobile device. The mobile virtual network operator 140 may create a textual list of the voice messages, optionally including the date, time, duration, and Caller ID information relating to each voice message. The mobile virtual network operator 140 may transfer data corresponding to the list to the mobile device 120 to enable the user of the mobile device 120 to select a voice message to retrieve among the list of stored voice messages.

The user may interact with the mobile virtual network operator 140 to make this selection using a web browser, an applet, a perishable application, or a client application installed on the mobile device 120. The mobile virtual network operator 140 may transfer a representation of the selected voice message to the mobile device 120 in the form of an audio data file, a perishable audio data file, or an audio playback within a voice telephone call. The mobile virtual network operator 140 may utilize servers and services provided by the mobile network service provider 160 to provide the visual voice mail service. For example, the mobile network service provider 160 may store the one or more voice messages on behalf of the mobile virtual network operator 140.

The mobile virtual network operator 140 may include an MVNO billing application 142 configured to facilitate billing a user of the mobile device 120 for network services; such as those provided through the MVNO network services application 144. The MVNO billing application 142 may communicate with the mobile network service provider billing application 167. The purpose of the communication may be for the mobile virtual network operator 140 to bill the user of the mobile device 120. The bill may be for network services 163 provided to the mobile device 120. The bill for the network services 163 may be provided by the mobile virtual network operator 140 on behalf of the mobile network service provider 160. Likewise, the MVNO billing application 142 may communicate with a content provider billing application 117. The purpose of the communication may be for the mobile virtual network operator 140 to bill the user of the mobile device 120. The bill may be for purchases of digital content 113. The bill for the purchases may be provided by the mobile virtual network operator 140 on behalf of the content provider 110.

The applications, content, and functionality of optional content provider 110 described herein may be included in

9

mobile virtual network operator 140 and/or mobile network service provider 160. A server at the content provider 110 may be operated to provide digital content 113 to one or more customers over the network 150. The one or more customers may be users of the mobile device 120 or personal 5 computing device 130. Digital content 113 at content provider 110 may be stored on a computer readable data storage medium such as a magnetic hard drive, optical disk, CD-ROM, DVD-ROM, HD-DVD disk, Blu-ray disk, magnetic tape, or flash memory.

The digital content 113 may include digital audio data files, mobile device ring-tones, e-book data files, picture data files, video data files, e-mail data files, voice message data files, SMS data files, document files, and software applications. The content provider 110 provides representations (e.g., copies) of the digital content 113 over the network 150.

The content provider 110 may also include billing application 117. The content provider 110 may be configured to bill a user for representations of the digital content 113 20 purchased and/or received from the content service provider 110. The content provider 110 may maintain an account record corresponding to a user, who may be a customer of the content provider 110. The account record may be similar to that described elsewhere herein with reference to the 25 mobile virtual network operator 140. The content provider 110 may use the account record to determine whether to offer the user digital content 113, what items of digital content 113 to make available to the user, and what prices to charge the user for those available items of digital content 113.

The network 150 is inclusive of a wireless network such as a cellular telephone network, a WiFi network, a WiMax network, or a Long Term Evolution (LTE) network. The wireless network may be operated by a mobile network 35 service provider such as the mobile network service provider 160. The network 150 may also include a wired network such as the Internet. The wired network may further include wired connections such as Ethernet connections, plain old telephone service (POTS) connections, digital subscriber 40 line (DSL) connections, community access television (CATV) connections, fiber optic connections, and coaxial cable connections. The wired network may include a network operated by the mobile virtual network operator 140, content provider 110, or mobile network service provider 45 160. The content provider 110, mobile device 120, personal computing device 130, mobile virtual network operator 140, and/or mobile network service provider 160 may communicate with one another over the network 150 via one or more wireless and/or wired networks.

A user may initiate a connection between the mobile device 120 and the content provider 110 via the network 150. The connection may be established using a web browser running on the mobile device 120 and communicating with a web server running on a server at the content 55 provider 110. Alternatively, the connection may be established using an applet or client software application running on the mobile device 120. The applet or client software application may be included with the MVNO client software 127. The applet or client software application, in turn, 60 communicates with a server software application running on a server at the content provider 110. A content selection interface provided on the mobile device 120 may be configured to inform the user of one or more available items of digital content 113 available from the content provider 110.

The content provider 110 and/or the content selection interface may selectively enumerate available items of the

10

digital content 113. These enumerations may be based upon various criteria such as user preferences, desired digital content genre or category, and user account balance with the content provider 110. The content selection interface may list the available items of digital content 113 in the form of a textual list, collection of graphical icons, or other means of presentation. After the user selects an available item from the list, the content selection interface, through mobile device 120, transmits the selection to the content provider 110 via the network 150.

The content provider 110 may be configured to require the user of the mobile device 120 to authorize a purchase of the selection through the billing application 117. Identifying information (as disclosed elsewhere herein) may be transmitted by the user and/or the mobile device 120 to the content provider 110. The identifying information may be used to authorize the purchase. For example, the identifying information may be compared with the account record. The billing application 117 may store a user's credit card number on file and allow the user to authorize a charge on the credit card by transmitting a password from the mobile device 120 to the content provider 110 or via an SMS message.

The billing application 117 may transmit a Premium SMS message or a Reverse Billed SMS message to the mobile device 120 requesting the user to authorize the purchase of the selection. After the user authorizes a charge for the purchase, the content provider 110 bills the user via the mobile virtual network operator 140 or the mobile network service provider 160 on behalf of the content provider 110. In this manner, the mobile virtual network operator 140 or the mobile network service provider 160 may include a charge from the content provider 110 on the user's mobile virtual network operator or mobile network service provider bill. The user may then pay the mobile virtual network operator 140 or the mobile network service provider 160 directly for the charge as part of the user's bill payment. The mobile virtual network operator 140 or the mobile network service provider 160 then pays the content provider 110 for the charge, which may include a transaction fee.

The content provider 110 may be configured to transfer a representation (e.g., transmit a copy) of the selected digital content 113 to the personal computing device 130 associated with the user of the mobile device 120. The representation may include a single selected format of the selected digital content 113 or multiple formats of the selected digital content 113. For example, the representation may include a digital music file in an MP3 format and another representation of the same digital music file in an AAC format. Alternatively, the representation may include multiple representations of a digital music file encoded at different bit rates. For example, one representation may be optimized for quality at a higher bit rate and have a larger file size, while another representation is optimized to conserve bandwidth at a lower bit rate and have a smaller file size. The representation optimized for quality may be intended for transfer to the mobile device 120 in a single "chunk", while the representation optimized to conserve bandwidth may be intended to transfer to the mobile device 120 via streaming

The personal computing device 130 may be owned or controlled by an entity other than the mobile virtual network operator 140, mobile network service provider 160, and content provider 110. Alternatively, the personal computing device 130 may be owned or controlled by an entity that owns or controls any of the above. The personal computing device 130 may be owned or controlled by the user of the mobile device 120. The personal computing device 130

includes MVNO local services software 138. The MVNO local services software 138 may be configured to perform functions related to the MVNO network services application 144. The MVNO local services software 138 may also include a content acquisition application configured to 5 receive the representation of the selected digital content 113 from the content provider 110. The content acquisition application is configured to store the representation of the selected digital content 113 to a local content store 132. The personal computing device 130 may be configured to receive 10 a unique authentication token from the mobile device 120. Based on the authentication token, the personal computing device 130 may authorize the mobile device 120 to access

11

The local content store 132 may be stored on a computer readable data storage medium as discussed elsewhere herein. The representation of the selected digital content 113 may be stored in an original form as received from the content provider 110. The representation of the selected digital content 113 may be stored in the local content store 132 indefinitely, whether or not a representation of the selected digital content 113 is transferred to the mobile device 120 is lost or damaged, the representation of the selected digital content 113 may not be 215 file sizes when free available memory, screen size, and screen resolution.

The reformatting may be performed such that the reformatted digital content transferred to the mobile device 120 corresponds to an optimal data size range as determined by factors listed above. As an example, the downloaded content may be reformatted to more compact file sizes when free available memory, screen size, and screen resolution.

The reformatting may be performed such that the reformatted digital content transferred to the mobile device 120 is lost or damaged, the representation of the selected digital content store matted digital content transferred to the mobile device 120 is lost or damaged, the representation of the selected digital content store matted digital content transferred to the mobile device 120 is lost or damaged, the representation of the selected digital content store matted digital content transferred to the mobile device 120 is lost or damaged, the representation of the selected digital content store matted digital content transferred to the mobile device 120 is lost or damaged, the representation of the selected digital content store matted digital content transferred to the mobile device 120 is lost or damaged, the representation of the selected digital content store matted digital content transferred to the mobile device 120 is lost or damaged, the representation of the selected digital content transferred to the mobile device 120 is lost or damaged.

data or utilize services provided by the personal computing

device 130.

The personal computing device 130 also includes content management software 136. The content management software 136 may be configured to manage digital content stored in local content store 132, MVNO local services 30 software 138, content reformatting application 135, and content transfer application 134. Various content management functions may be performed by the content management software 136 or by other software modules in conjunction with the content management software 136.

The personal computing device 130 may be configured to reformat downloaded digital content using the content reformatting application 135. The content reformatting application 135 may decode, encode, transcode, or resample digital content. The content reformatting application 135 may ini- 40 tiate reformatting of the downloaded content in response to a command issued by another software module at the personal computing device 130, the content provider 110, or by the mobile device 120. Reformatting may also occur automatically according to user preferences stored at the 45 personal computing device 130. The content reformatting application 135 may include copying a file stored in the local content store 132 while changing a file format from one format to another, or while changing a bit rate or resolution such that the copy has a different bit rate or resolution than 50 the original.

In one example, the content reformatting application 135 reformats an MPEG-2 encoded video file to a 3GP encoded video file by copying the MPEG-2 encoded video file and saving the copied video file in the local content store 132 as 55 a 3GP encoded video file. In a second example, the content reformatting application 135 reformats an AVI encoded video file having a resolution of 720 by 480 pixels to an AVI encoded video file having a resolution of 360 by 240 pixels. In another example, the content reformatting application 135 60 reformats an MPEG-4 encoded video file having a frame rate of approximately 30 frames per second (fps) to an MPEG-4 encoded video file having a frame rate of approximately 15 fps. By further example, the content reformatting application 135 reformats an MP3 encoded audio file having 65 a bit rate of 192 kilobits per second (kbps) to an MP3 encoded audio file having a bit rate of 128 kbps.

12

The content reformatting application 135 may also be configured to reformat the downloaded content based upon a command received from the mobile virtual network operator 140 or available bandwidth between the personal computing device 130 and the mobile device 120. The content reformatting application 135 may also reformat the downloaded content based upon a factor dependent on the personal computing device 130 such as available storage space at the personal computing device 130, a factor dependent on the mobile device 120, a user-selectable preference, or a preset preference. The factor dependent on the mobile device 120 may include supported codecs (e.g., MP3 and WMA), bit rates (i.e., bits per second), sampling rates (i.e., samples per second), sample resolutions (i.e., bits per sample), and video frame rates (i.e., frames per second). The factor dependent on the mobile device 120 may also include processing power, memory size, free available memory, screen size, and screen resolution.

The reformatting may be performed such that the reformatted digital content transferred to the mobile device 120 corresponds to an optimal data size range as determined by factors listed above. As an example, the downloaded content may be reformatted to more compact file sizes when free available memory at the mobile device 120 is low. Alternatively, the downloaded content may be reformatted to larger file sizes when free available memory at the mobile device is high. As another example, the downloaded content may be reformatted to a lower resolution screen size when the mobile device 120 is a cellular telephone than when the mobile device 120 is a PDA. The downloaded content may be reformatted to resolution somewhat larger (finer) than the screen size resolution to allow the downloaded content to be zoomed and cropped to a reasonable degree at the mobile device 120.

The content transfer application 134 is configured to transfer a representation of the downloaded content to the mobile device 120. The content transfer application 134 may transfer the representation of the downloaded content in response to a command received from the content provider 110, the mobile virtual network operator 140, the mobile device 120, a user of the personal computing device 130, and/or the content management software 136. Alternatively, the content transfer application 134 may transfer the representation of the downloaded content automatically according to a user preference setting.

The content transfer application 134 may transfer the representation of the downloaded content to the mobile device 120 as a single file sent in one contiguous "chunk" by a protocol such as File Transfer Protocol (FTP). Alternatively, the content transfer application 134 may transfer the representation of the downloaded content to the mobile device 120 using a streaming media protocol such as User Datagram Protocol (UDP), Real-time Streaming Protocol (RTSP), Real-time Transport Protocol (RTCP), Real-time Transport Control Protocol (RTCP), Transmission Control Protocol (TCP), or other protocols suitable for streaming digital media over networks. Transferring the representation using the streaming media protocol may be referred to as "streaming" the representation.

The content reformatting application 135 may be configured to reformat a file stored in the local content store 132 based upon a characteristic of the file such as file size, file type, access history, or probability of being requested by the mobile device 120. The format and/or resolution used for reformatting may be chosen based upon a historical pattern of formats or resolutions previously requested by the mobile device 120. Similarly, a historical record of available band-

width between the personal computing device 130 and the mobile device 120 may be used.

In an example, downloaded content that is identified as having been frequently accessed is reformatted in advance of being requested by the mobile device 120. Likewise, in 5 another example, downloaded content such as an audio book may be reformatted at a lower bit rate than downloaded content such as a music file, which requires a higher bit rate.

Mobile device 120 includes a content reception interface 125 configured to receive the representation of the downloaded content transferred by the personal computing device 130. The content reception interface 125 may be integrated with various components configured to store the representation of the downloaded content. The downloaded content may be stored at a mobile content store 122 for later retrieval 15 and use on the mobile device 120. The mobile content store 122 may include a computer-readable data storage medium as described elsewhere herein. The content reception interface 125 may alternatively be configured to buffer the representation of the downloaded content for more immediate playback on the mobile device 120.

The mobile virtual network operator 140 may be configured to act as an intermediary between the personal computing device 130 and the mobile device 120. The MVNO network services 144 may include a content transfer appli- 25 cation configured to relay data between the personal computing device 130 and the mobile device 120. In this configuration, rather than transferring a representation of the downloaded content from the local content store 132 to the mobile device 120, the content transfer application 134 30 transfers a representation of the downloaded content to the mobile virtual network operator 140 via the network 150. The mobile virtual network operator content transfer application receives the representation of the downloaded content from the personal computing device 130, optionally refor- 35 mats the representation of the downloaded content using a content reformatting application within the MVNO network services 144, and transfers the optionally reformatted representation of the downloaded content to the mobile device

The personal computing device 130, the mobile network service provider 160, or the mobile virtual network operator 140 may be configured to monitor and measure available communication channel bandwidth in a connection to the mobile device 120 over the network 150. The available 45 bandwidth may be determined by monitoring data throughput between the personal computing device 130, a digital content provider 110, or mobile virtual network operator 140 and the mobile device 120. The bandwidth may be measured continuously during data transmission such that when a 50 bandwidth measurement value is desired, a separate bandwidth measurement does not need to be made.

Alternatively, the available bandwidth may be determined based on a network service plan that includes policies that enforce a limit on available bandwidth to some pre-determined value. For example, a basic network service plan may include a lower bit per second bandwidth for streaming media or a lower limit on kilobits of data transfer per billing period than an expanded network service plan. The available bandwidth may also be determined based upon a difference 60 between the service plan policy limit and a measure of the service already utilized during a billing period. The network service plan may be provided and/or enforced by either or both the mobile virtual network operator 140 and the mobile network service provider 160.

The available bandwidth may be used to determine a format, bit rate, or resolution of the representation of digital 14

content transferred to the mobile device 120. The mobile virtual network operator 140 may reformat digital content transferred to the mobile device 120 to correspond to the available bandwidth. In an example, the personal computing device 130 measures throughput of data transmitted to the mobile device 120 to be 100 kbps. The personal computing device 130 then uses the content reformatting application 135 to resample a selected MP3 file in the local content store 132 from 192 kbps to 96 kbps prior to streaming the MP3 file to the mobile device 120.

The personal computing device 130 may be configured to transfer a representation of any data stored on the personal computing device 130. For example, the personal computing device 130 may allow the mobile device 120 to access data available at the personal computing device 130 such as the downloaded content or other data that was not downloaded from the digital content provider 110, including data on a computer readable storage medium coupled to the personal computing device 130. The personal computing device 130 may include an indexing engine to index data available for access by the mobile device 120 via the computing device 130. The mobile device 120 and the computing device 130 may be configured to communicate with each other in a manner similar to that described elsewhere herein with reference to the mobile device 120 selecting and downloading digital content from the digital content provider 110.

The personal computing device 130 may be configured to receive an authentication token from the mobile device 120 to authorize the mobile device 120 prior to providing data and/or services to the mobile device 120. The authentication token may be an identifying element associated with the user of the mobile device 120 or the mobile device 120 itself.

The personal computing device 130 may be configured to serve as a proxy for the mobile device 120. The personal computing device 130 may allow the mobile device 120 to access network services and servers such as the content provider 110 via a proxy application. The proxy application may be included within the MVNO local services software 138. The proxy application may be configured such that a connection between the mobile device 120 and the content provider 110 via the proxy application appears to be a direct connection.

Alternatively, the proxy application may be configured to allow the mobile device 120 to control a direct connection between the personal computing device 130 and the content provider 110. Additionally, the proxy application may allow the mobile device 120 to access any data available via a connection from the personal computing device 130 to one or more computing devices and servers over the network 150. The mobile device 120 and the proxy application may be configured to communicate with each other in a manner similar to that described elsewhere herein with reference to the mobile device 120 selecting and transferring digital content from the digital content provider 110. The mobile virtual network operator 140 may also be configured to serve as a proxy for the mobile device 120 in a manner described above with reference to the personal computing device 130.

FIG. 2 is a flowchart depicting a method of operating a mobile virtual network. In this exemplary method 200, a mobile network service is provided by authenticating a mobile device (120) over a mobile network, providing a service to the mobile device, and monitoring usage of the mobile network by the mobile device.

In step 210, the mobile device is authenticated over the mobile network. A server associated with a mobile virtual network operator (MVNO, 140) may receive an identifying element from the mobile device. The identifying element

15

may be used as a unique authentication token to authenticate the mobile device. The server may then authenticate the mobile device based on the authentication token. The mobile device may be communicatively coupled to the server over the mobile network.

In step 220, a service is provided to the mobile device via the mobile network. The service may be provided in response to or in association with the authentication token discussed with reference to step 210. The service may be branded by an entity other than the operator of the mobile 10 network. For example, the service may be branded by an MVNO.

In optional step 230, digital content on a server communicatively coupled with the mobile network is accessed by the mobile device. The server may be owned or operated by 15 a third party. The third party may be an entity other than an owner or user of the mobile device. The third party may also be an entity other than the MVNO. The access may include receiving a list of digital content available for purchase or download and downloading the digital content to a personal 20 computing device. The personal computing device may be communicatively coupled to both the server and the mobile device. The access may include streaming digital content from the server to the mobile device or a personal computing device. The user may access digital content by first selecting 25 the digital content to access from a list presented to the user at the mobile device. The digital content may be accessed via a proxy application. The proxy application may run on the personal computing device or on a server at the MVNO.

In optional step 240, the digital content is reformatted. 30 The computing device may reformat the digital content by copying the accessed digital content and saving the copied digital content on a computer readable storage medium in a different format. Reformatting may include filtering, transcoding, refactoring, and/or resampling. The reformatting may be performed in response to a request received from the mobile device. This request may include a request to download content in a format different from that of the accessed digital content.

The new format requested may be based upon a variety of 40 factors including user settings, content genre, original content format, DRM authorization, and available free storage space on a computer readable storage medium coupled with the computing device. Additional factors include available bandwidth of a data channel between the mobile device and 45 the computing device and available bandwidth of a data channel between the MVNO and the mobile device. Other factors related to the mobile device include screen size, screen resolution, memory size, available free memory, processing power, supported codecs, supported bit rate, 50 supported sampling rate, supported sample resolution, supported video frame rate, and the like.

The computing device may reformat the digital content in one or more different formats automatically upon receiving the digital content from the content provider. By automatically reformatting in advance of a request to download the digital content to the mobile device, latency between a request to download the reformatted digital content to the mobile device and completion of the requested download may be reduced. The MVNO, which is communicatively coupled with the computing device and the mobile device over the network, may receive the digital content from the computing device and reformat the digital content in preparation to forward the reformatted digital content to the mobile device.

In optional step 250, a representation of the digital content is transferred to the mobile device. The computing device

16

may transfer the representation of the digital content over the network. The MVNO may transfer the representation of the digital content to the mobile device.

The mobile device, the MVNO, and/or the computing device may be configured to automatically and/or periodically transfer a representation of digital content from the computing device to the mobile device. The transferred representation may be chosen according to a variety of factors. The transferred representation may be chosen randomly or according to user settings such as a playlist. The transferred representation may also be chosen according to a history of prior transfers. The history of prior transfers may indicate the frequency with which various digital content has been transferred in the past. The history of prior transfers may also indicate an elapsed time since a particular item of digital content has been transferred. The transferred representation may also be chosen according to a characteristic of recently downloaded digital content or an analysis of web sites recently visited by the user of the mobile device. Additionally, the transferred representation may be chosen according to a location of the mobile device.

The digital content received from the server hosting the digital content may require a storage capacity exceeding the available memory or storage space on the mobile device. The mobile device and/or the computing device may be configured to transfer a representation of a portion of the digital content rather than the entire received digital content. The user of the mobile device may be queried to select one or more portions of the digital content to transfer. The user of the mobile device may be queried regarding whether to transfer the one or more portions of the digital content via contiguous "chunks" and/or streaming media. An algorithm may be utilized to automatically select the one or more portions of the digital content to transfer based upon factors as described elsewhere herein.

The mobile device may be configured to selectively replace existing digital content already stored at the mobile device with a representation of the digital content received from the server hosting the digital content by deleting the selected stored digital content to free storage space prior to transferring the representation of the digital content received from the server. One or more of a variety of algorithms may be provided to select the stored digital content to delete. The algorithm may consider one or more of the following factors in making the selection: available storage space, frequency of access or playback, elapsed time since last access or playback, user-specified priority, or user-selection at a deletion prompt. Additional factors the algorithm may consider include logical grouping or genre of digital content such as music style, artist, album, program series, and so forth. Alternatively, the mobile device may be configured to receive the digital content by streaming media if the mobile device has insufficient available memory or storage space to receive the digital content via contiguous "chunks".

The mobile device, the MVNO, and/or the computing device may be configured to establish a lifetime for a representation of digital content to remain on the mobile device prior to automatically being deleted. The lifetime may be useful to provide a means for digital content to be automatically deleted to free memory on the mobile device. The lifetime may be a characteristic of a perishable or disposable representation of digital content. The lifetime may also be set according to a requirement of the content provider, for example to enforce a rental of digital content as opposed to a purchase of digital content.

In step 260, usage of the mobile network by the mobile device is monitored. Usage of service provided to the mobile

device by the mobile virtual network and the mobile network service provider may be monitored. The MVNO or the mobile network service provider may monitor the usage and may track and record the usage. The record of the usage may

be used for billing purposes.

17

FIG. 3 is a flowchart depicting a billing method 300 for a mobile virtual network operator. In this exemplary billing method 300, a user of a mobile device (120) is identified by the MVNO and/or a mobile network service provider. Additionally, a network service and service plan are identified and priced. Furthermore, the MVNO bills the user on behalf of the mobile network service provider.

In step **310**, the user of the mobile device is identified. The MVNO and/or the mobile network service provider may maintain a customer account record corresponding to the user. The user may be a customer of the MVNO. The MVNO and/or the mobile network service provider may identify the user by receiving at least one identifying element from the mobile device and matching the at least one identifying 20 element with the customer account record.

In step 320, the user's service plan subscribed to or purchased from the MVNO is identified. The service plan may be identified by an entry in the user's customer account record. The service plan may also be identified by the user 25 selecting the service plan to purchase from a list or enumeration of service plans offered for purchase to the user.

In step 330, a mobile network service provided to the mobile device is identified. The mobile network service may be provided by the MVNO. Alternatively, the mobile network service provider on behalf of the MVNO. Data transmitted by the mobile device may be used to identify the mobile network service. For example, the mobile device may transmit an SMS text message. According to an SMS text message standard protocol, a data sequence may be provided which uniquely identifies the mobile network service as an SMS text message. The mobile network service may also be identified by the user. The user may select the mobile network service from a list or enumeration of mobile network services.

In step 340, a price of the service plan purchased is determined. The price may be determined according to the user's customer account record. The price may also be 45 determined according to list prices offered to all customers. Special offers and discounts offered to the user may also be taken into account in determining the price. An auction may be used to determine the price. Other methods of determining a price as known in the art may be used.

In step 350, a price of the mobile network service provided to the mobile device is determined. The price may be determined in a manner similar to that described with reference to step 340. A financial transaction may be conducted including an agreement by the user to pay the price 55 for the mobile network service provided to the mobile device by the MVNO, the payment optionally being made via a third party.

In an exemplary method of conducting the financial transaction, the MVNO bills the user directly. The MVNO 60 may have the user's credit card on file as part of the user's customer account record. The MVNO may use SMS-based authorization or a software application installed on the mobile device. The software application may be configured to conduct the financial transaction between the user of the 65 mobile device and the MVNO. The software application may include security features such as encryption in con-

18

ducting the financial transaction. A unique authentication token may be provided by the mobile device to validate the financial transaction.

In optional step 360, a Premium SMS Message is sent to the mobile device. The Premium SMS Message may be sent to the user of the mobile device via the mobile network to conduct a financial transaction. The Premium SMS Message may be encoded to facilitate the following sequence of activities. The user identified in step 310 replies to the Premium SMS Message. By replying, the user confirms an agreement to purchase the service plan and/or the mobile network service selected in steps 320 and 330. Additionally, the user confirms an agreement to pay the prices determined in steps 340 and 350, respectively. Alternatively, the user may be instructed to send an SMS message to a specified number, such as a 5 digit Short Code, to confirm the agreement to purchase the service plan and/or the mobile network service.

The Premium SMS message may be used to validate the financial transaction. Validating the financial transaction includes the following activities. The user identified in step 310 executes an agreement to purchase the service plan and/or the mobile network service selected in steps 320 and 330. The user executes an agreement to purchase the service plan and/or the mobile network service for the prices determined in steps 340 and 350, respectively. The financial transaction may be validated by receiving a purchase confirmation in response to the Premium SMS message. Validating the financial transaction may include the MVNO receiving an identifying element from the user. The identifying element may be used as a unique authentication token to validate the financial transaction.

In step 370, information representative of an invoice for the service plan purchased and the network service provided to the mobile device is submitted to the MVNO. The invoice may relate to the Premium SMS message discussed in relation to step 360. The user may then be billed on behalf of the mobile network service provider by the MVNO. The information may include an identity of the user of the mobile device, a price of the service plan purchased by the user of the mobile device, a price of the network service provided to the mobile device, a date of the purchase, and so forth. A charge for the service plan and network service may be included on an MVNO bill sent to the user. The user may pay the MVNO for the charge. The MVNO may pay the mobile network service provider at least a portion of the amount paid by the user. The MVNO may optionally subtract a transaction fee or the like from the amount paid by the user before paying the mobile network service provider.

FIG. 4 is a flowchart depicting a method 400 of using a service provided by a mobile virtual network operator. In this exemplary method 400, a unique authentication token is provided by a mobile device (120) over a mobile network. A network service is used on the mobile device. The method further includes downloading a representation of digital content to the mobile device over the mobile network.

In step **410**, a mobile device provides a unique authentication token to a server over a mobile network. The authentication token may be an identifying element used to identify and authenticate the mobile device with a provider of a mobile network service. The server may be associated with the provider of the mobile network service or an MVNO. The server may use the authentication token to authenticate the mobile device.

In step **420**, the mobile device uses a service provided by the server via the mobile network. The service may be provided in response to or association with the unique 19

authentication token discussed with reference to step 410. The service may be branded by an entity other than the operator of the mobile network, such as an entity that owns or controls the server or an MVNO.

In optional step 430, the mobile device accesses digital 5 content from a computing device over the mobile network. The access may be performed in a manner similar to optional step 230. The mobile device may download a representation of digital content stored at the computing device communicatively coupled to the server over a network (150). The 10 download may be responsive to or authorized by the unique authentication token provided to the server by the mobile device as described in step 410. The computing device may be owned, operated, or controlled by an entity other than an entity that operates the mobile network or the server. For 15 example, the computing device may be owned, operated, or controlled by a user of the mobile device or a digital content provider.

In optional step 440, messages communicated via multiple mediums are associated with one another. For example, 20 messages communicated with a single entity via multiple mediums may be associated with one another in a chronologically ordered list. The chronologically ordered list may be presented to the user of the mobile device as a single conversation.

In optional step 450, an optimal communication medium is determined for communicating a message to an entity. The message is then communicated to the entity using that medium. The determination of the optimal communication medium may be based on at least one communication 30 characteristic related to the entity, such as most recently used or most frequently used communication medium between the user of the mobile device and the entity. The determination of the optimal communication medium may also be based on time of day or day of week. The determination of 35 the optimal communication medium may also be based on length of message, urgency of message, or type of message (e.g., voice, text, picture, or video). The determination of the optimal communication medium may also be based on user-selectable preference or predefined preference. The 40 determination of the optimal communication medium may also be based on location, presence of the entity, or availability of the entity via the communication medium. After the optimal communication medium is determined, the message is communicated to the entity over the determined 45 representation occurs based on a location of the first device optimal communication medium.

In optional step 460, a representation of digital content stored at the mobile device is transferred to the computing device over the network. The transfer may be performed automatically or by explicit instruction from the user of the 50 mobile device. The transfer may be performed to back up the digital content from the mobile device to the computing device. The transfer may be performed to publish the digital content and thereby make the digital content available to others over the network via the computing device.

In optional step 470, a perishable application is downloaded, executed, and deleted. The perishable application is downloaded from a server to the mobile device over the mobile network. The mobile device executes the perishable application. After the perishable application has been 60 executed a predetermined number of times, has resided on the mobile device longer than a preset period of time, or is no longer needed, the perishable application is deleted from the mobile device.

The embodiments illustrated, described, and discussed 65 herein are illustrative of the present invention. As these embodiments of the present invention are described with

20

reference to illustrations, various modifications or adaptations of the methods and or specific structures described may become apparent to those skilled in the art. It will be appreciated that modifications and variations are covered by the above teachings and within the scope of the appended claims without departing from the spirit and intended scope thereof All such modifications, adaptations, or variations that rely upon the teachings of the present invention, and through which these teachings have advanced the art, are considered to be within the spirit and scope of the present invention. Hence, these descriptions and drawings should not be considered in a limiting sense, as it is understood that the present invention is in no way limited to only the embodiments illustrated.

What is claimed is:

- 1. A first device configured for communicating with a second device associated with a same user, the first device comprising:
  - a memory:
  - a processor configured for:
    - authenticating the first device of a user;
    - accessing content in response to a selection at an application at the first device;
    - transmitting a representation of the accessed content to an application at a second device associated with the user, wherein the second device is authenticated over a mobile network.
    - wherein the content is transmitted to the second device in response to a selection at the second device, wherein the selection identifies accessed content at the first device to be transmitted,
    - wherein, subsequent to the second device authenticating over the mobile network, the second device is authenticated with the first device before the content
    - wherein the application at the first device and the application at the second device are branded by a
    - wherein the same entity is other than a provider that operates the mobile network.
- 2. The first device of claim 1, wherein transmitting the representation of the accessed content occurs automatically.
- 3. The first device of claim 1, wherein transmitting the and on a location of the second device.
- 4. The first device of claim 1, wherein the second device receives a notification of available content.
- 5. The first device of claim 1, wherein a connection is provided between the first device and the second device.
- 6. The first device of claim 5, wherein the connection is maintained even if the first device is not connected over the mobile network.
- 7. The first device of claim 1, wherein the content is 55 created at the first device.
  - 8. The first device of claim 1, wherein a notification is displayed on the second device, wherein the notification identifies that accessed content is available at the first device.
  - 9. The first device of claim 1, wherein the accessed content is content stored locally on the device without being downloaded from a remote entity over the mobile network.
  - 10. The first device of claim 1, wherein the first device and the second device share a same user account.
  - 11. The first device of claim 1, wherein the content is one of audio files, picture data files, video data files, document files, and software applications.

10

20

21

- 12. A second device configured for communicating with a first device associated with a same user, the second device comprising:
  - a memory:
  - a processor configured for:
    - receiving, at an application at the second device, a representation of content accessed at an application at the first device associated with a user of the first device and the second device, wherein the second device is authenticated over a mobile network,
    - wherein the content is accessed in response to a selection at the application at the first device;
    - receiving the accessed content in response to a selection at the second device, wherein the selection identifies accessed content at the first device to be transmitted,
    - wherein, subsequent to the second device authenticating over the mobile network, the second device is authenticated with the first device before the representation of the accessed content is received,
    - wherein the application at the first device and the application at the second device are branded by a same entity.
    - wherein the same entity is other than a provider that operates the mobile network.
- 13. The second device of claim 12, wherein the representation of the accessed content is received automatically.
- 14. The second device of claim 12, wherein the representation of the content is received based on a location of the first device and on a location of the second device.
- 15. The second device of claim 12, wherein the second device receives a notification of available content.
- 16. The second device of claim 12, wherein a connection is provided between the first device and the second device.
- 17. The second device of claim 16, wherein the connection is maintained even if the second device is not connected over the mobile network.
- 18. The second device of claim 12, wherein the content is created at the first device.
- **19**. The second device of claim **12**, wherein a notification <sup>40</sup> is displayed on the second device, wherein the notification identifies that accessed content is available at the first device.
- 20. The second device of claim 12, wherein the accessed content is content stored locally on the first device without  $^{45}$ being downloaded from a remote entity over the mobile network.
- 21. The second device of claim 12, wherein the second device and the first device share a same user account.

22

- 22. The second device of claim 12, wherein the content is one of audio files, picture data files, video data files, document files, and software applications.
- 23. A first device configured for communicating with a second device associated with a same user, the first device comprising:
  - a memory:
  - a processor configured for:
    - authenticating a device of a user;
    - creating content in response to a selection at an application of the first device;
    - transmitting a representation of the content to an application at a second device that is communicatively coupled to the first device and is associated with the user, wherein the second device is authenticated over a mobile network.
    - wherein the content is transmitted to the application at the second device in response to a selection at the second device, wherein the selection identifies accessed content at the first device to be transmitted,
    - wherein, subsequent to the second device authenticating over the mobile network, the second device is authenticated with the first device before the content is transmitted.
    - wherein a connection is maintained between the first device and the second device to allow transmission of the representation even if the first device is not connected over the mobile network,
    - wherein the application at the first device and the application at the second device are branded by a same entity,
    - wherein the same entity is other than a provider that operates the mobile network.
- 24. The first device of claim 1, wherein the representation
- 25. The first device of claim 1, wherein the representation of content is in a different format than a format of the accessed content.
- 26. The second device of claim 12, wherein the representation of content is different than the accessed content.
- 27. The second device of claim 12, wherein the representation of content is in a different format than a format of the accessed content.
- 28. The first device of claim 23, wherein the representation of content is different than the accessed content.
- 29. The first device of claim 23, wherein the representation of content is in a different format than a format of the accessed content.